

QUINT-BAT/24DC/ 7.2AH

Order No.: 2866352




<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2866352>

Rechargeable battery module, lead AGM, VRLA technology, 24 V DC,
7.2 Ah. Connection via male cable lug, 14 mm.



[http://
www.download.phoenixcontact.com](http://www.download.phoenixcontact.com)
Please note that the data given
here has been taken from the
online catalog. For comprehensive
information and data, please refer
to the user documentation. The
General Terms and Conditions of
Use apply to Internet downloads.

Commercial data

GTIN (EAN)	 4 017918 959753
sales group	H061
Pack	1 pcs.
Customs tariff	85072080
Catalog page information	Page 591 (IF-2009)

Technical data

Input data

Nominal input voltage	24 V DC
-----------------------	---------

Output data

Nominal output voltage	24 V DC
Output current	max. 50 A
Connection in parallel	Yes, for increasing the buffer period
Connection in series	No
Output fuse	2x 25 A

General data

Width	164 mm
Height	156 mm
Depth	110 mm
Net weight	6 kg
Memory medium	battery 7.2 Ah
Degree of protection	IP20
Protection class	III
Ambient temperature (operation)	0 °C ... 40 °C
Ambient temperature (storage/transport)	0 °C ... 40 °C
Shipbuilding approval	Germanischer Lloyd (EMC 2), ABS

Certificates / Approvals




Certification GL

Accessories

Item	Designation	Description
Fuse		
0913757	SI FORM C 25 A DIN 72581	Flat-type plug-in fuse, type C, color code: white, nominal current: 25 A
General		
2866857	QUINT-ADAPTER/4	Assembly adapter for QUINT-BAT/24DC... on 35mm rail

Diagrams/Drawings

Block diagram

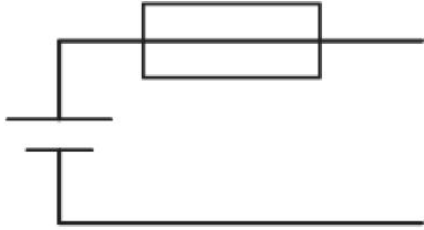

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2011 Phoenix Contact
Technical modifications reserved;