

## Directional valves → Silencers

## Silencers, Series SI1

## ► Sintered bronze



P100\_060




Working pressure min./max.  
Ambient temperature min./max.  
Medium

0 bar / 10 bar  
-25 °C / +80 °C  
Compressed air

Materials:  
Silencers  
Thread

Sintered bronze  
Brass

## Dimensions

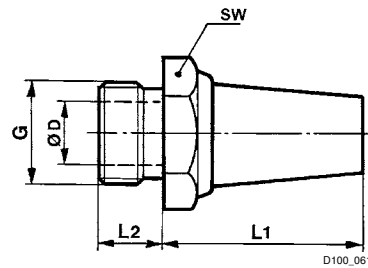

Part No.	Port G	Sound pressure level [db(A)]	Qn [l/min]	SW	Ø D	L1	L2	Weight [kg]	Delivery quantity [Piece]
<b>1827000006</b>	M5	72	460	7	2.5	15	5	0.004	10
<b>8140000700</b>	M7	-	-	10	4	15	5	0.006	10
<b>1827000000</b>	G 1/8	75	1500	13	6	18	6	0.01	10
<b>R412004817</b>	G 1/4	-	-	16	8.5	18.7	7.6	0.013	10
<b>1827000001</b>	G 1/4	79	2900	17	8.5	25	8	0.02	10
<b>1827000002</b>	G 3/8	84	5900	22	12	34	10	0.05	5
<b>1827000003</b>	G 1/2	90	7100	27	14.5	44	12	0.08	2
<b>1827000004</b>	G 3/4	92	8800	32	19	66	14	0.13	1
<b>1827000005</b>	G 1	102	11100	41	25	66	16	0.18	1

Sound pressure level measured at 6 bar at 1 m distance