


Directional valves → Supplementary products

Silencers, Series SI1

► Polyethylene




Working pressure min./max.
Ambient temperature min./max.
Medium

0 bar / 10 bar
-25 °C / +80 °C
Compressed air

Materials:
Silencers
Thread

Polyethylene
Polyethylene

Dimensions

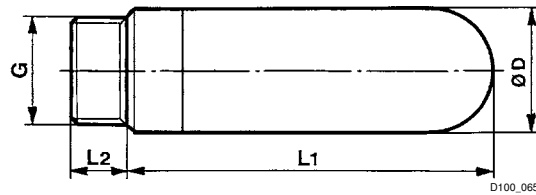

Part No.	Port G	Sound pressure level [db(A)]	Qn [l/min]	Ø D	L1	L2	Weight [kg]	Delivery quantity [Piece]		
1827000018	M5	-	-	6.5	17.5	4	0.001	5		
1827000019	G 1/8	78	1500	12.5	28.5	5.5	0.002	5		
1827000020	G 1/4	80	3100	15.5	34.5	8	0.003	5		
1827000021	G 3/8	85	5300	18.5	56	11.5	0.008	2		
1827000022	G 1/2	88	7000	23.3	66.5	11	0.013	1		
1827000023	G 3/4	-	-	38.5	115.5	16	0.04	1		
1827000024	G 1	-	-	49	140	21	0.055	1		

Sound pressure level measured at 6 bar at 1 m distance

Supplementary products

Part numbers marked in bold are available from the central warehouse in Germany, see the shopping basket for more detailed information
Pneumatics catalog, online PDF, as of 2013-02-08, © Bosch Rexroth AG, subject to change