

Preparation of compressed air → Maintenance units and components

Distributor, Series AS3-DIS

► G 3/8 - G 1/2 ► Distributor 4x ► Distributor ► suitable for ATEX



00119389

ATEX
Version
Mounting orientation
Working pressure min./max.
Medium
Medium temperature min./max.
Ambient temperature min./max.

II 2G2D T4 X
Distributor, Can be assembled into blocks
Any
0 bar / 16 bar
Compressed air
-10 °C / +50 °C
-10 °C / +50 °C

Materials:
Housing
Front plate
Seals
Threaded bushing

Polyamide
Acrylonitrile butadiene styrene
Acrylonitrile Butadiene Rubber
Die cast zinc

Technical Remarks

- Suitable for direct mounting of a PE1 and PM1 series pressure sensor (flange version)

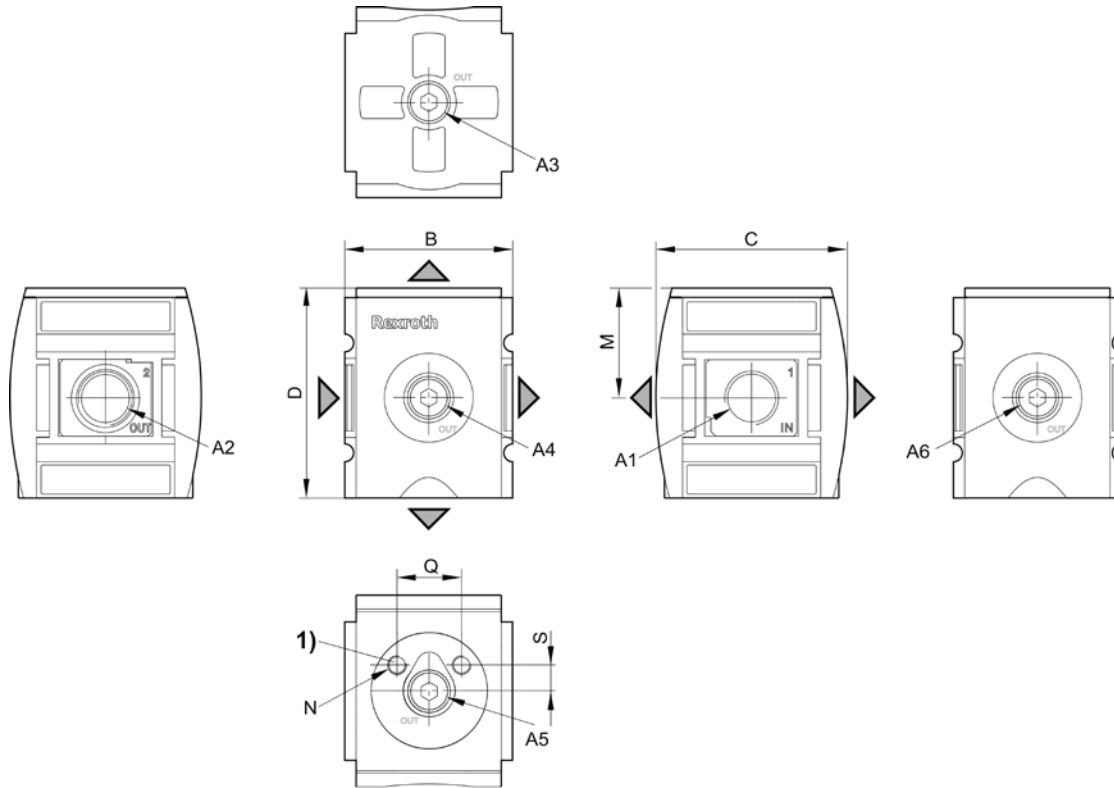
	Port	Qn					Weight	Part No.
		1►2	1►3	1►4	1►5	1►6		
		[l/min]					[kg]	
	G 3/8						0.32	R412007250
	G 1/2	7250	5500	2250	2250	2250		R412007251

Nominal flow Qn at p1 = 6.3 bar and Δp = 1 bar

Preparation of compressed air → Maintenance units and components

Distributor, Series AS3-DIS

► G 3/8 - G 1/2 ► Distributor 4x ► Distributor ► suitable for ATEX

Dimensions

A1 = input
 A2 = output
 1) Mounting thread for pressure sensor

00124429

A1	A2	A3	A4	A5	A6	B	C	D	M	N	Q	S
G 3/8	G 3/8	G 1/2	G 3/8	G 1/4	G 3/8	63	74	80.5	42.5	M5	20	8
G 1/2	G 1/2	G 1/2	G 3/8	G 1/4	G 3/8	63	74	80.5	42.5	M5	20	8