

Sensor technologies → Pressure sensors

Pressure Switches, Series PM1

► Operating pressure: -0.9 - 16 bar ► mechanical ► electr. connection: Plug, ISO 4400, form A ► Spring-loaded bellow, adjustable



21212

Measurement	Relative pressure
Switching element	microswitch (input/output)
Switching frequency	1,5 Hz
Protection against overpressure	80 bar
Ambient temperature min./max.	-20 °C / +80 °C
Medium temperature min./max.	-10 °C / +80 °C
Medium	Compressed air hydraulic oil
Shock resistance max. (XYZ direction)	15 g
Vibration resistance (XYZ direction)	10 g (60 - 500 Hz)
Switching point	adjustable
Hysteresis	max. switching pressure difference
DC operating voltage min./max.	12 V - 125 V
Operational voltage AC min./max.	12 V - 250 V
Mounting orientation	Any
Mounting types	via through holes
Function	change-over contact (mechanical)
Protection class	IP 65
Weight	0.16 kg
Materials:	
Housing	Aluminum
Seals	Acrylonitrile Butadiene Rubber
Bellow	Brass
Electr. connection	Brass, nickel-plated

Technical Remarks

- Switching function increasing pressure: contact switches from 1-2 to 1-3. Switching function decreasing pressure: contact switches from 1-3 to 1-2.
- Notice: Too-high currents can damage contacts. Inductive or capacitive loads must be equipped with appropriate spark-quenching!
- The microswitch has silver-plated contacts.

	Type	Operating pressure range min./max.	Compressed air connection	Repeatability (% of full scale value)	Fig.	Note	Part No.
		[bar]					
	PM1-M3-G014	-0.9 / 0	internal thread, G1/4	± 1 %	Fig. 1	2)	R412010711
	PM1-M3-G014	0.2 / 16	internal thread, G1/4	± 1 %	Fig. 1	1); 3) 1); 2)	R412010712 R412010713
	PM1-M3-F001	-0.9 / 0	Flange with O-ring, Ø 5x1,5	± 1 %	Fig. 2	2)	R412010714

- 1) Min. switching pressure range 0.2 bar falling/0.5 bar rising
 2) Scope of delivery: with electrical connector
 3) Scope of delivery: without electrical connector

Sensor technologies → Pressure sensors

Pressure Switches, Series PM1

► Operating pressure: -0.9 - 16 bar ► mechanical ► electr. connection: Plug, ISO 4400, form A ► Spring-loaded bellows, adjustable



	Type	Operating pressure range min./max.	Compressed air connection	Repeatability (% of full scale value)	Fig.	Note	Part No.
		[bar]					
	PM1-M3-F001	0.2 / 16	Flange with O-ring, Ø 5x1,5	± 1 %	Fig. 2	1); 3)	R412010715
						1); 2)	R412010718
1) Min. switching pressure range 0.2 bar falling/0.5 bar rising 2) Scope of delivery: with electrical connector 3) Scope of delivery: without electrical connector							

Fig. 1

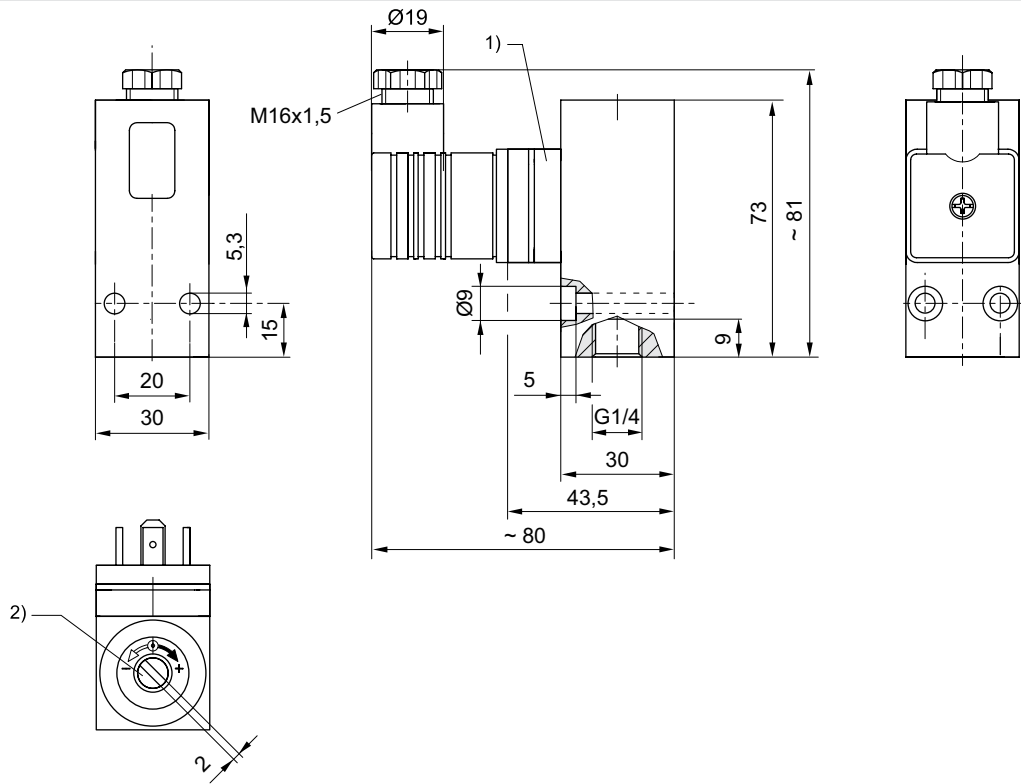


- 1) Electrical connector
- 2) Adjustment screw, self-holding

17184

Sensor technologies → Pressure sensors


Pressure Switches, Series PM1

► Operating pressure: -0.9 - 16 bar ► mechanical ► electr. connection: Plug, ISO 4400, form A ► Spring-loaded bellows, adjustable

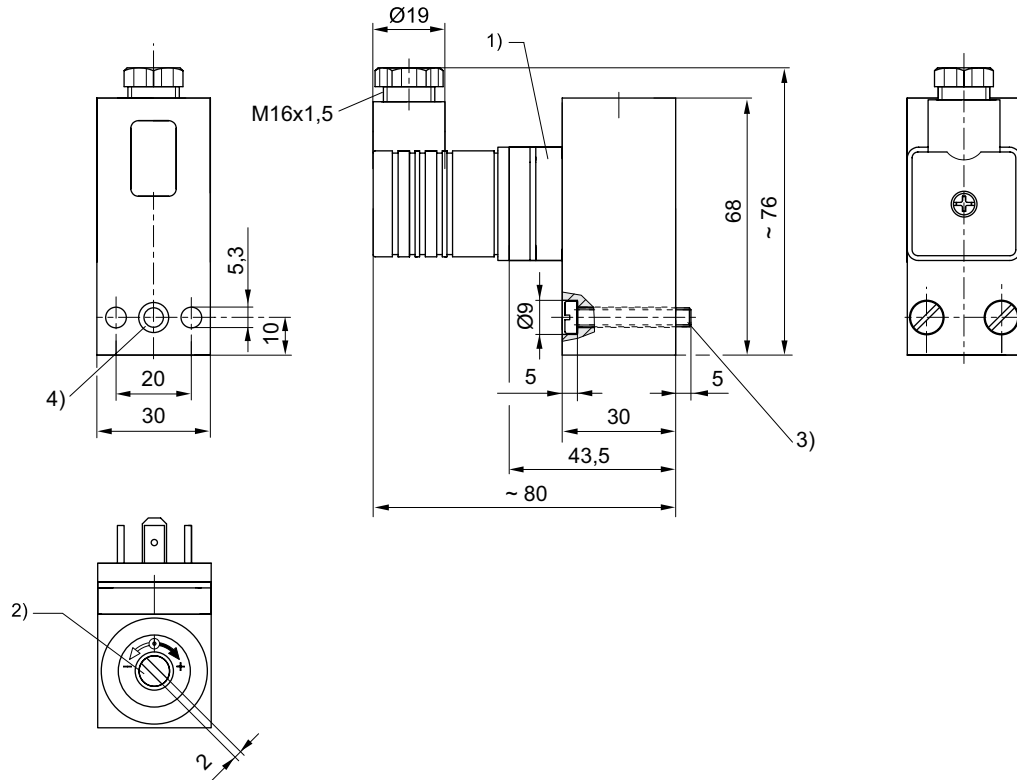Fig. 2

17185

- 1) Electrical connector
- 2) Adjustment screw, self-holding
- 3) cylinder screw M5x30 (included in scope of delivery)
- 4) O-ring Ø5x1,5 (included)

PIN assignment for electrical connector

17186


- 1) +UB
- 2) break contact
- 3) make contact
- 4) GND

Sensor technologies → Pressure sensors

Pressure Switches, Series PM1

► Operating pressure: -0.9 - 16 bar ► mechanical ► electr. connection: Plug, ISO 4400, form A ► Spring-loaded bellow, adjustable

differential switching pressure characteristic curve (-0.9 – 0 bar)

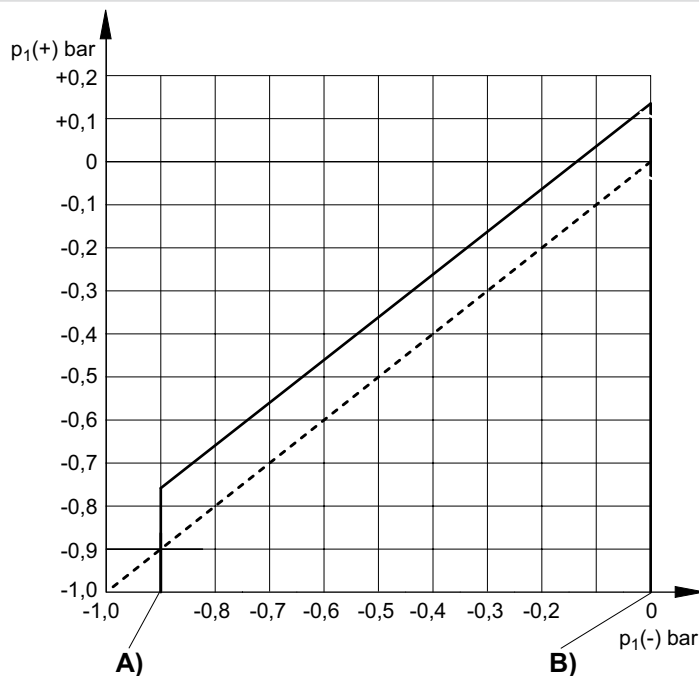

17187

A) $p_1(-)$, min.

B) $p_1(-)$, max.


$p_1(+)$ = upper switching pressure with increasing pressure

$p_1(-)$ = lower switching pressure with decreasing pressure

Sensor technologies → Pressure sensors

Pressure Switches, Series PM1

► Operating pressure: -0.9 - 16 bar ► mechanical ► electr. connection: Plug, ISO 4400, form A ► Spring-loaded bellows, adjustable

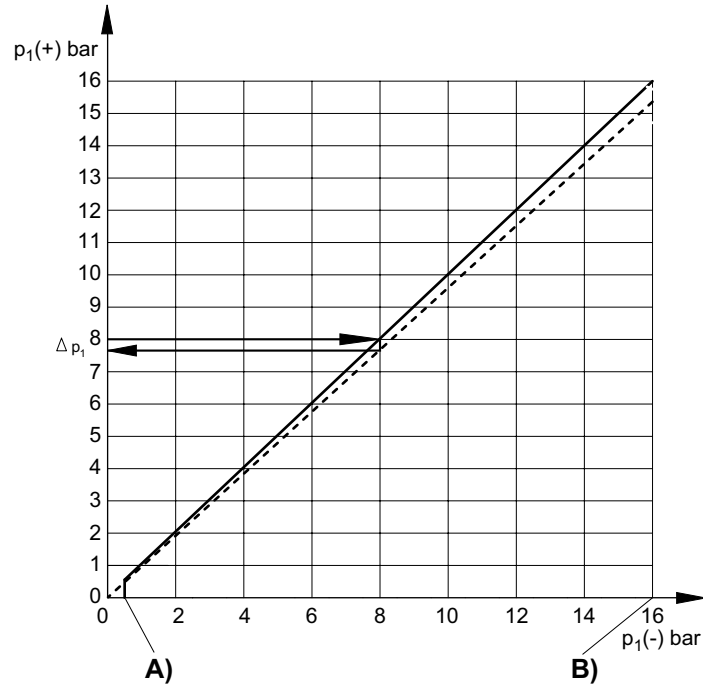differential switching pressure characteristic curve (0,2 – 16 bar)

17188

A) p1 (-), min.

B) p1 (-), max.

p1 (+) = upper switching pressure with increasing pressure

p1 (-) = lower switching pressure with decreasing pressure

 Δp_1 = max. operating pressure difference or hysteresis

Example:

p1 (+) = 8 bar > p1 (-) = 7.6 bar

 $\Delta p_1 = 0.4$ bar**max. permissible continuous current I max. [A] with ohmic load**

U [V]	30	48	60	125	250							
I [A] 1)	5	5	5	5	5							
I [A] 2)	3	1,2	0,8	0,4	–							

reference cycle: 30/min., reference temperature: +30°C

1) AC

2) DC

max. permissible continuous current I max. [A] with inductive load

U [V]	30	48	60	125	250							
I [A] 1) 3)	3	3	3	3	3							
I [A] 2) 4)	2	0.55	0.4	0.15	–							

reference cycle: 30/min., reference temperature: +30°C

1) AC

2) DC

3) $\cos \approx 0,7^\circ$ 4) L/R ≈ 10 ms