


# Accessory Devices - Silencers

Silencers, NPT threads  
Metal construction




## Canister-Style Silencer - NPT Threads

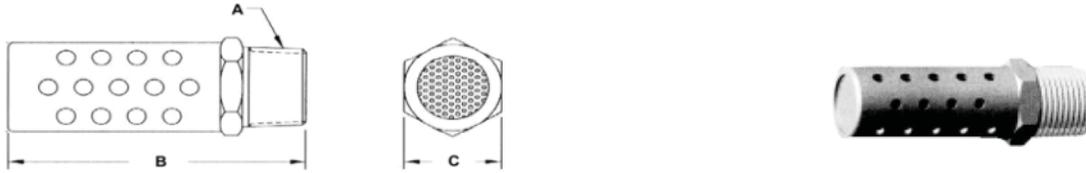

Recommended for pressures up to 125 PSI. Construction of brass and zinc-plated steel.

Part Number	A	B (in.)	C (in.)	Flow (SCFM) at 90 psi	Weight (oz.)
R432012062	1/8-27 NPT	1.38	0.43	44	0.02
R432012060	1/4-18 NPT	1.75	0.56	96	0.05
R432012058	3/8-18 NPT	2.10	0.68	200	0.08
R432011952	1/2-14 NPT	2.75	0.87	450	0.50
R432012059	3/4-14 NPT	3.15	1.06	560	0.30
R432012057	1-11 1/2 NPT	3.87	1.31	800	0.50
R432012061	1 1/4-11 1/2 NPT	4.50	1.68	1120	0.85

## Sintered Bronze Cone Silencer - NPT Threads

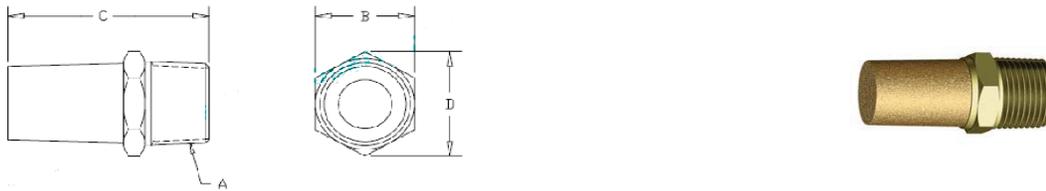

Recommended for pressures up to 125 PSI. Construction brass and bronze. Porosity: 40 micron

Part Number	A	B (in.)	C (in.)	D (in.)
R432000825	1/8-27 NPT	7/16	0.89	0.50
R432000826	1/4-18 NPT	9/16	1.28	0.65
R432000827	3/8-18 NPT	11/16	1.52	0.81
R432000828	1/2-14 NPT	7/8	1.98	1.03
R432000829	3/4-14 NPT	1 1/16	2.28	1.25

## Sintered Bronze Breather/Vent - NPT Threads



Recommended for pressures up to 125 PSI. Construction brass and bronze. Porosity: 90 micron

Part Number	A	B (in.)	C (in.)	D (in.)
R432000830	1/8-27 NPT	0.40	7/16	0.50
R432000831	1/4-18 NPT	0.68	9/16	0.65
R432000832	3/8-18 NPT	0.79	11/16	0.81
R432000833	1/2-14 NPT	0.97	7/8	1.03
R432000834	3/4-14 NPT	1.06	1 1/16	1.25