



Air-Lube Spra-Control Valve

DESCRIPTION

The Graco Trabon Spra-Control Valve automatically allows pressurized air to enter the air-lube mixing nozzle when supplied with lubricant under pressure. The Spra-Control Valve also shuts off the pressurized-air supply to the nozzle when the lubricant pressure ceases.

Lubricant, oil, or grease can be supplied directly from the pump, as in the case of a single isolated spray; it can also be supplied from injectors or divider valves which feed several Spra-Control Valves. In some cases where multipurpose lubricant is used, bearing taps and gear sprays may be served by the same pump and manifold system. Air-lube nozzles providing normal and wide cone spray patterns are of the non-clogging external mix type. Minimum air pressure required is 20 psi, maximum is 150 psi.

FEATURES


- Conserves air – air required only during spray interval.
- Positive air shut-off – self-sealing air valve action.
- Versatile – can be used with most centralized lube systems or mechanical oilers - will handle grease or oil.
- External mix nozzle purges itself and prevents clogging.
- Saves Lubricant – by spraying smaller amounts at frequent intervals provides better film, no waste.

TYPICAL FLUIDS HANDLED

- Oil – minimum of 100 SUS at 100° F
- Grease – NLGI #1 at any temperature, NLGI #2 at 32° F or above



DIMENSIONS Inches (mm)

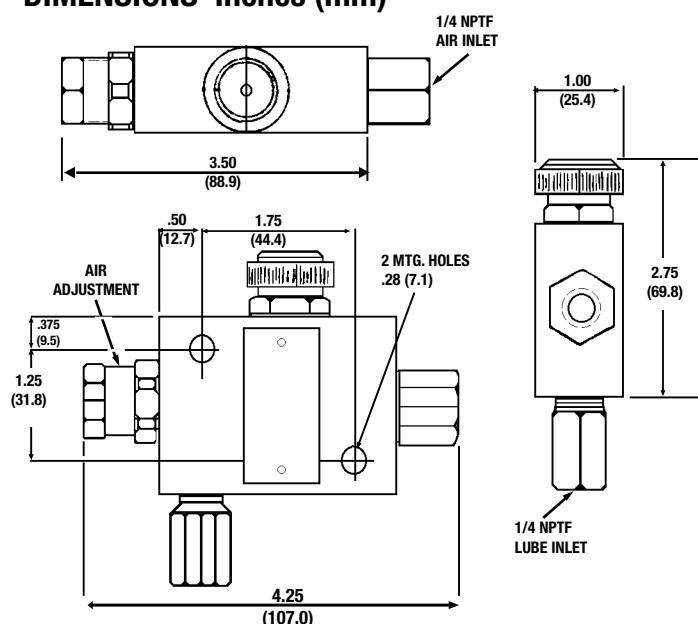

ORDERING INFORMATION						
Diameter of Spray at 6 in	Complete Valve and Nozzle Assembly	Valve Body Only	Retaining Ring	Gasket	Air Nozzle Only	Lube Nozzle Only
4 in (Normal)	563275 (510-652-000)	560585 (510-647-001)	557497 (510-637-000)	557500 (510-641-000)	557498 (510-638-000)	557499 (510-639-000)
8 in (Wide)	563276 (510-652-230)	560585 (510-647-001)	557497 (510-637-000)	557500 (510-641-000)	126750	557499 (510-639-000)

Check valve 563211 (509-365-030) supplied in lube inlet.

Contact us today!

To receive product information or talk with a Graco representative, call 800-533-9655 or visit us online at www.graco.com.

