


3.10

Pressure reducing valve direct operated

Type DR5DP...10

Size 5
up to 315 bar
up to 15 L/min



Contents

Function and configuration	02
Symbols	02
Specification	03
Technical data	03
Characteristic curves	04
Unit dimensions	05

Features

- Direct operated structure
- Porting pattern to DIN 24 340 form A and ISO4401
- 5 pressure ratings
- 3 adjustment elements:
 - Rotary knob
 - Adjustable bolt with protective cap,
 - Lockable adjustable handle
- Check valve, optional


Function and configuration

The valve type DR5DP is a 3-way direct operated pressure reducing valve with a pressure relief function on the secondary side.


It is used to reduce the system pressure. The secondary pressure is set by the pressure adjustment element (4).

At static position, the valve is normally open and the pressure fluid flows unhindered from port P to port A. The pressure in port A acts at the spool area opposite to the compression spring (3) via the control line (6) and the spray nozzle(7). When the pressure in port A get the value setting at compression spring (3), the control spool (2) moves into the control position and keeps the setting pressure in port A constant. The internal control oil is taken from port A, or from external by port X. If the pressure in port A still increases due to external forces on the actuator, the control spool (2) moves still further towards the compression spring (3). This causes a flow path to be opened via control land(8) on the control spool (2). Sufficient fluid then flows back to tank to prevent any further pressure rise.

Fluid in spring chamber always drained to tank externally via port Y. For free return flow from port A to port P an optional check valve(5) can be fitted.

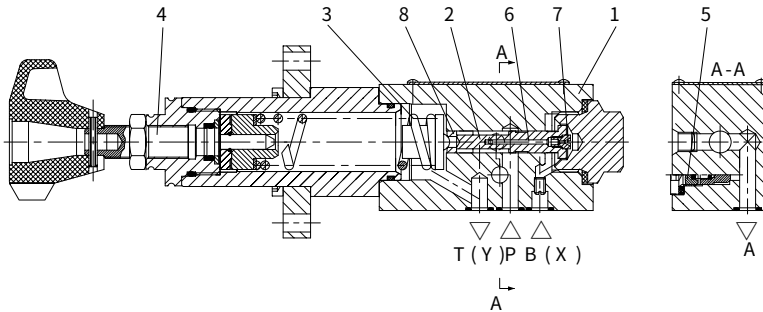

Symbols

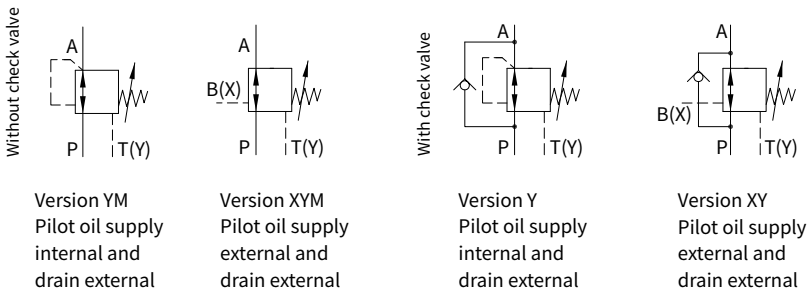

Specification




	DR5DP	- 10	/				*	
Without plate fixing flange (Standard version)=No code With plate fixing flange =F								Further details in clear text
Direct operated pressure reducing valve nominal size 5								No code = NBR seals V = FKM seals
Rotary knob =1 Adjustable bolt with protective cap =2 Lockable adjustable handle =3								No code = With check valve M = Without check valve
Series 10 = 10								Y = Pilot oil supply internal Oil drain external XY = Pilot oil supply external Oil drain external
								2.5 = Max. secondary pressure 25 bar 7.5 = Max. secondary pressure 75 bar 15 = Max. secondary pressure 150 bar 21 = Max. secondary pressure 210 bar 31.5 = Max. secondary pressure 315 bar

Notes :315bar only for version without check valve

Technical data

Fluid	Mineral oil suitable for NBR and FKM seal		
	Phosphate ester for FKM seal		
Fluid temperature range	°C	-30 to +80 (NBR seal)	
		-20 to +80 (FKM seal)	
Viscosity range	mm ² /s	10 to 800	
Degree of contamination	Maximum permissible degree of fluid contamination: Class 9. NAS 1638 or 20/18/15, ISO4406		
Max.operating pressure	Port P	bar	315
Max.secondary pressure	Port A	bar	25; 75; 150; 210; 315(without check valve)
Max.backing pressure	PortT(Y)	bar	60
Max. flow-rate	L/min	15	
Weight	kg	Approx.1.4	

Characteristic curves (Measured at $t=40^{\circ}\text{C} \pm 5^{\circ}\text{C}$, using HLP46)

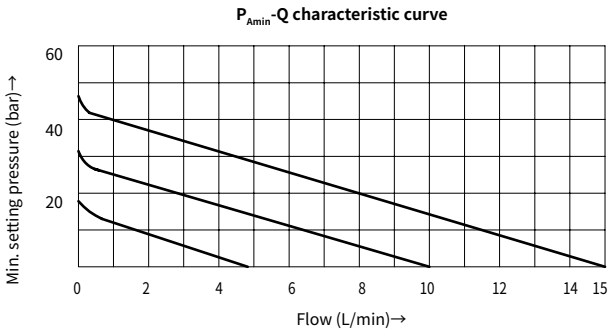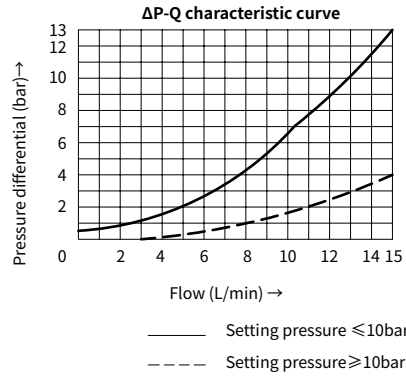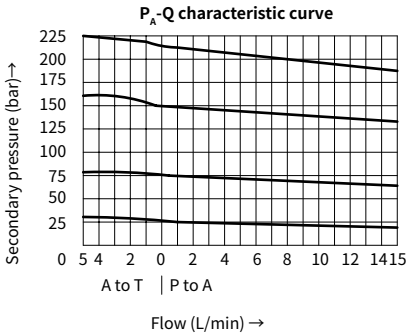


P_{Amin} -Q Characteristic curve shows the flow-rate in relation to the adjustable min. pressure rating from P to A.

For instance:

pressure is 25 bar and flow-rate is 10L/min,
 adjusts the pressure of port A to 20bar,
 when the secondary pressure increases to 23bar,
 the flow-rate trends to zero.

Unit dimensions

(Dimensions in mm)

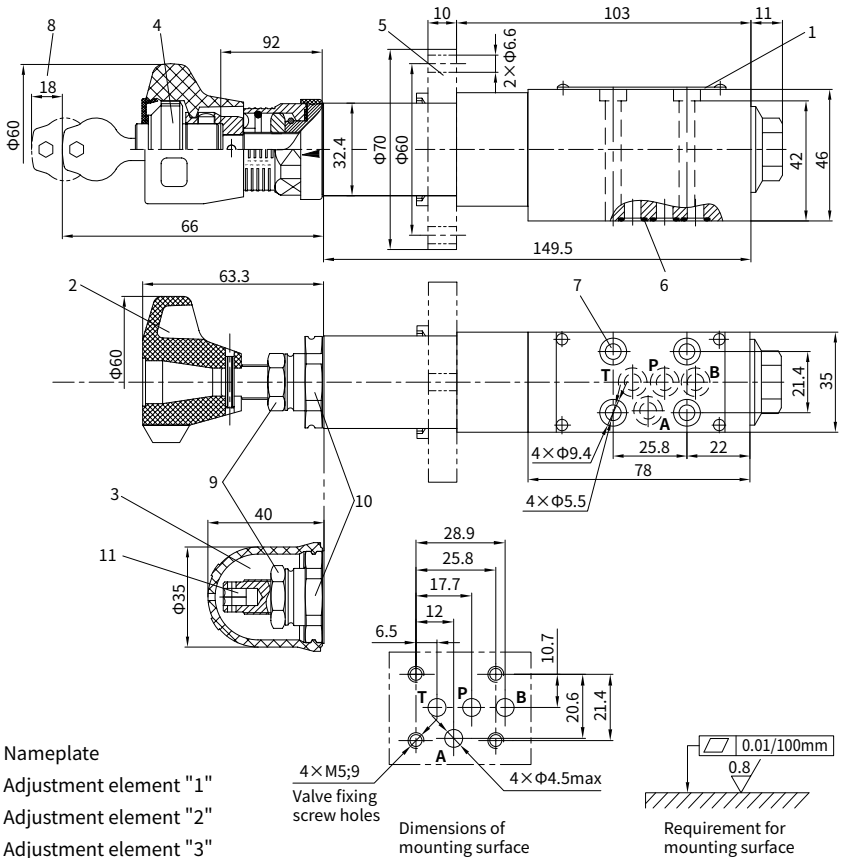

- 1 Nameplate
- 2 Adjustment element "1"
- 3 Adjustment element "2"
- 4 Adjustment element "3"
- 5 Plate fixing flange
- 6 O-ring 7×1.5 (P, T, A, B)
- 7 Valve fixing holes
- 8 Space required to remove the key
- 9 Lockable nut S=19
- 10 External hexagon screw S=30
- 11 Internal hexagon screw S=6

It must be ordered separately, if connection plate is needed

Type: G 115/01A (G1/4) G 115/02A (M14×1.5)

Valve fixing screws:

GB/T 70.1-M5×50 -10.9, internal hexagon screw
Tightening torque $M_A = 9\text{Nm}$

03

China

+86 400 101 8889

America

+01 630 995 3674

Germany

+49 174 1386469

Japan

+81 03 6809 1696



© This brochure can be reproduced, edited, reproduced or transmitted electronically without the authorization of Hengli Hydraulic Company. Due to the continuous development of the product, the information in this brochure is not specific to the specific conditions or applicability of the industry, thus, Hengli does not take any responsibility for any incomplete or inaccurate description.