

Δ PRESSURE TO Δ PRESSURE ADAPTORS

NOSHOK differential pressure to differential pressure adaptors allow two differential pressure transmitters to be mounted on a single set of orifice taps. This configuration is ideal for applications such as bi-directional flow, and custody transfer where only a single set of orifice taps is available. Multiple adaptors are available for various application configurations and space restrictions.




DP1-DP1-CS / DP1-DP1-SS*
3/8" bore, 23" length



DP2-DP12-CS / DP2-DP2-SS*
3/8" bore, 9" length

VERTICAL TO HORIZONTAL ADAPTOR KIT

The Vertical to Horizontal Adaptor Kit converts vertically mounted Stabilized Connectors to a horizontal position for mounting additional valves and instrumentation.

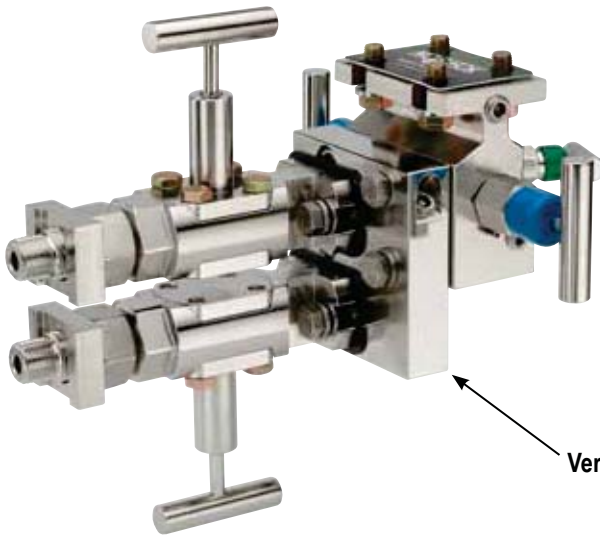

Vertical to Horizontal Adaptor Kit



VHC/VHS*

* All 316SS products meet the requirements of NACE MR0175/ISO 15156-3.

For products shown above that are composed of Brass and/or Carbon Steel:



WARNING: This product can expose you to chemicals including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

For products shown above that are composed of Stainless Steel:



WARNING: This product can expose you to chemicals including Chromium (VI) and Nickel, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov