


SACC-M12FR-4CON-PG 7-VA

Order No.: 1553284

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1553284>Sensor/actuator connector, female, angled, 4-pos., M12, screw
connection, high-grade steel knurl, cable screw connection PG7**Commercial data**

GTIN (EAN)	 4 046356 170208
sales group	D121
Pack	1 pcs.
Customs tariff	85366990
Catalog page information	Page 211 (PC-2011)

Product notesWEEE/RoHS-compliant since:
11/10/2006

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data**General data**

Rated current at 40°C	4 A
Rated voltage	30 V
Number of positions	3
Volume resistance	≤ 5 mΩ
Insulation resistance	≥ 100 MΩ

Ambient temperature (operation)	-25 °C ... 80 °C (Male connector / female connector)
General characteristics	
Standards/regulations	M8 connector IEC 61076-2-104
Coding	A - standard
Surge voltage category	II
Pollution degree	3
Degree of protection	IP65/67
Contact material	CuSn
Contact surface material	Ni/Au
Contact carrier material	TPU GF
Material of grip body	PA 6
Material, knurls	Zinc die-cast, nickel-plated
Sealing material	NBR
Connection method	QUICKON fast connection
Conductor cross section stranded min.	0.25 mm ²
Conductor cross section stranded max.	0.5 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	22
Frequency of connections between conductors of the same cross section	10
External cable diameter	2.5 mm ... 5 mm +/-0.2 mm
Wire insulation material	PVC/PE/PP
Structure of individual litz in acc. with VDE 0295 / smallest wire diameter	Class 2-6
Status display	No

Certificates / Approvals


Certification CUL, UL

Accessories


Item	Designation	Description
Tools		
1208461	SAC BIT M8-D10	Nut for assembling sensor/actuator cables with M8 connector and for M8 connectors with QUICKON fast connection technology, for 4 mm hexagonal drive
1208487	TSD 02 SAC	Torque screwdriver, with preset torque of 0.2 Nm and 4 mm hexagonal drive for M8 connectors

Diagrams/Drawings

Functional drawing

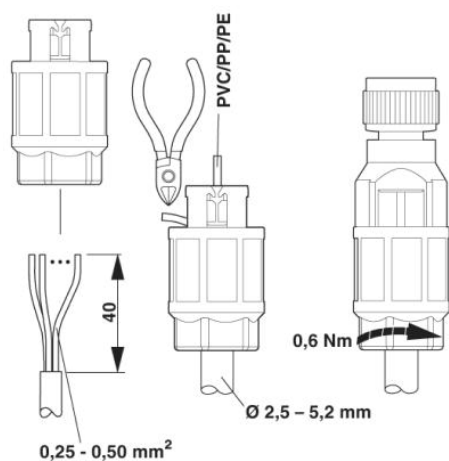


Dimensioned drawing

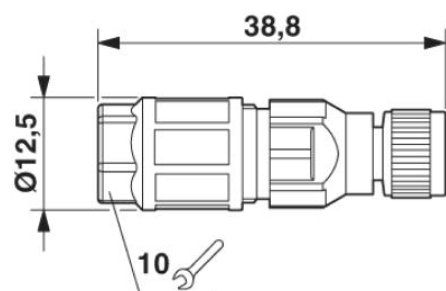

Socket M8 x 1, straight

Schematic diagram

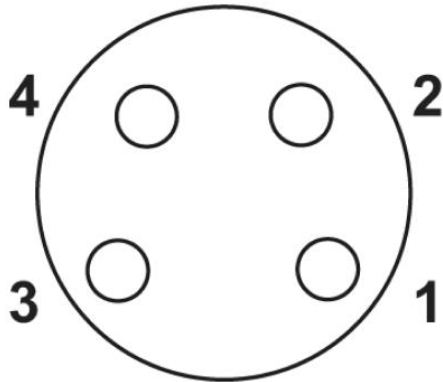

Pin assignment of M8 female connector, 4-pos., view of pin side

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact
Technical modifications reserved;