


**SACC-DSIV-FSB-5CON-L180 SCO**

Order No.: 1542606

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1542606>

Sensor/actuator flush-type socket, 5-pos., M12 SPEEDCON, B-coded, rear/screw mounting with M12 thread, with polarity protection, with straight solder connection

**Commercial data**

GTIN (EAN)	
sales group	D125
Pack	10 pcs.
Customs tariff	85366990
Catalog page information	Page 30 (PC-2009)

**Product notes**

WEEE/RoHS-compliant since:  
05/01/2006



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

**Technical data****General data**

Ambient temperature (operation)	-25 °C ... 85 °C
---------------------------------	------------------


**General characteristics**

Material	Zinc die-cast (nickel-plated)
----------	-------------------------------

Sealing material	NBR
Mounting type	M12 x 1

**Diagrams/Drawings**

Dimensioned drawing

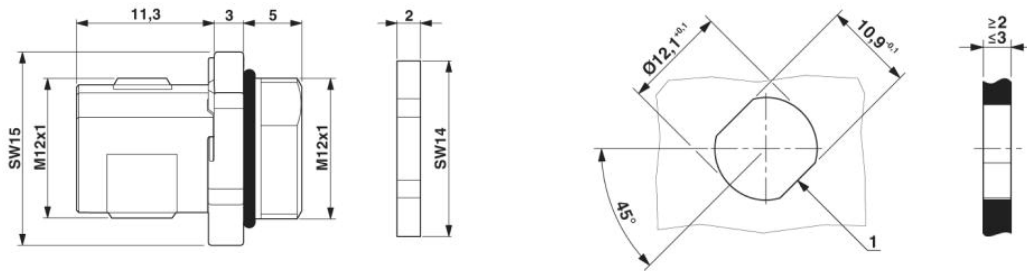

Housing cutout for M12 fastening thread,  
mounting panel with feed-through hole  
(alternative with surface as protection  
against rotation)

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact  
Technical modifications reserved;