


VS-25-DEVNET

Order No.: 1652240



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1652240>

D-SUB complete connector, for DeviceNet, shell size 3, plug, screw connection, unshielded, connection direction straight, IP67 degree of protection

Commercial data	
GTIN (EAN)	 4 017918 929169
sales group	D503
Pack	1 pcs.
Customs tariff	85369010
Catalog page information	Page 24 (PC-2005)

Product notes

WEEE/RoHS-compliant since:
06/22/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Mechanical characteristics

Number of positions	44
Insertion/withdrawal cycles	≥ 200
Connection method	Solder cup
Conductor cross-section	0.34 mm ²
Connection cross-section AWG	22
Insertion force per signal contact	≤ 3.40 N

Ambient temperature (operation)	-55 °C ... 125 °C
---------------------------------	-------------------

Material data

Inflammability class acc. to UL 94	V0
Housing material	Steel, yellow chromated
Contact carrier material	Polyester GF
Contact material	Copper alloy
Contact surface material	Hard gold-plated over nickel


Electrical characteristics

Rated voltage (III/3)	60 V
Rated surge voltage	1 kV
Rated current	3 A

Diagrams/Drawings

Dimensioned drawing

D-SUB contact insert

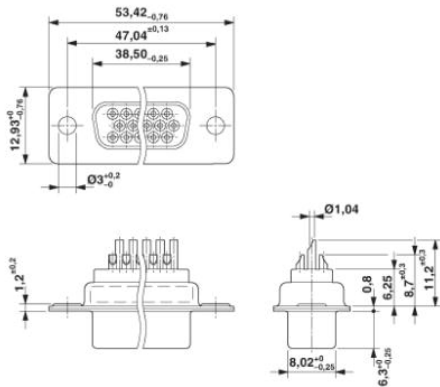

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2011 Phoenix Contact
Technical modifications reserved;