


## SAC-5P-M12YF/2XM12FS VP

Order No.: 1698013

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1698013>Y distributor, 5-position, Socket, straightLink:M12, A-coded, on Socket,  
straight M12, A-coded and Socket, straight M12, A-coded**Commercial data**

GTIN (EAN)	 4 017918 198138
Note	Made-to-order
sales group	D116
Pack	5 pcs.
Customs tariff	85369010

**Product notes**WEEE/RoHS-compliant since:  
11/27/2007

<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

**Technical data****General data**

Number of positions	5
Volume resistance	$\leq 5 \text{ m}\Omega$
Insulation resistance	$\geq 100 \text{ M}\Omega$


**General characteristics**

Coding	A - standard
Surge voltage category	II
Pollution degree	3
Degree of protection	IP65/IP68/IP69K


Insertion/withdrawal cycles	≥ 100
Contact material	CuZn
Contact surface material	Ni/Au
Contact carrier material	TPU GF
Material of grip body	TPU, hardly inflammable, self-extinguishing
Material, knurls	Zinc die-cast, nickel-plated
Sealing material	NBR
Status display	No

### Diagrams/Drawings

Schematic diagram

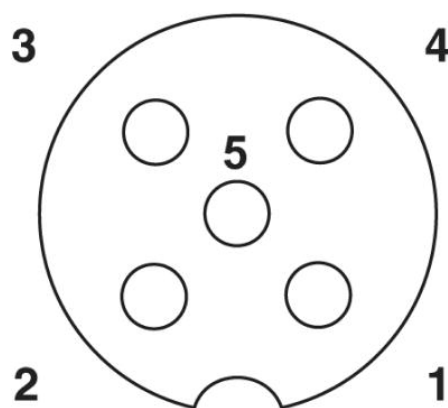

Pin assignment M12 socket, 5-pos., A-coded, socket side view

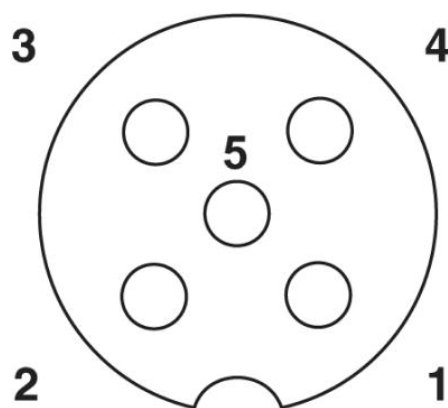

Pin assignment M12 socket, 5-pos., A-coded, socket side view

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2011 Phoenix Contact  
Technical modifications reserved;