


**MKDSO 2,5/ 4-L**

Order No.: 1707234

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1707234>

PC terminal block, Nominal current: 24 A, Nom. voltage: 400 V, Pitch: 5 mm, Number of positions: 4, Connection method: Screw connection, Mounting: Soldering, Conductor/PCB connection direction: 0 °, Color: green, Article with lateral pin exit

**Commercial data**

|                          |  |
|--------------------------|--|
| GTIN (EAN)               | <br>4 017918 136826 |
| sales group              | F057   |
| Pack                     | 50 pcs.  |
| Customs tariff           | 85369010   |
| Catalog page information | Page 105 (CC-2011)   |

**Product notes**WEEE/RoHS-compliant since:  
01/01/2003

<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.


**Certificates / Approvals**

Certification


CB, CCA, CSA, CUL, GOST, UL, VDE-PZI

## Diagrams/Drawings


Drilling plan/solder pad geometry

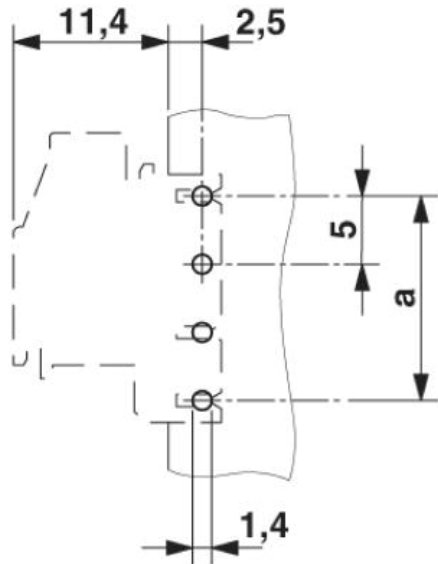


Dimensioned drawing

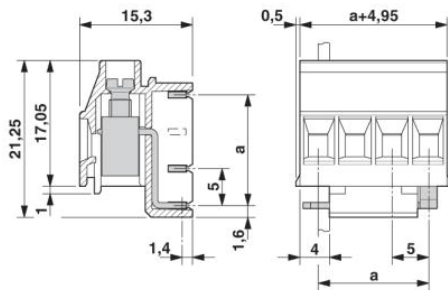

Schematic diagram

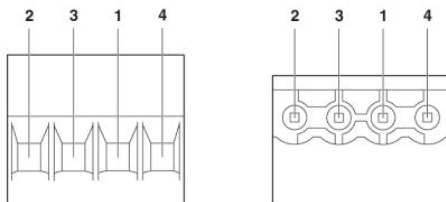

Pin assignment left

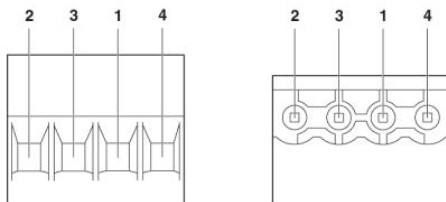

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2011 Phoenix Contact  
Technical modifications reserved;