


**SKBI 64/H15-MKDS5**

Order No.: 2269153

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2269153>Plug-in card block, Nominal current: 15 A, Number of positions: 64,  
Pitch: 0 mm, Connection method: Screw connection**Commercial data**

GTIN (EAN)	
sales group	E212
Pack	1 pcs.
Customs tariff	85369010
Catalog page information	Page 555 (CC-2011)

**Product notes**WEEE/RoHS-compliant since:  
05/24/2006

<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

**Technical data****Dimensions / positions**

Length	66 mm
Height	162 mm
Width	118 mm
Pitch	0 mm
Number of positions	64

Hole diameter	4.2 mm
Screw thread	M3
Tightening torque, min	0.5 Nm
Tightening torque max	0.6 Nm

**Technical data**

Range of articles	SKBI 64
Connection in acc. with standard	EN-VDE
Nominal current $I_N$	15 A
Nominal voltage $U_N$	500 V (surge voltage category III/contamination class 2)
Nominal cross section	2.5 mm <sup>2</sup>
Stripping length	8 mm

**Connection data**

Conductor cross section solid min.	0.2 mm <sup>2</sup>
Conductor cross section solid max.	6 mm <sup>2</sup>
Conductor cross section stranded min.	0.2 mm <sup>2</sup>
Conductor cross section stranded max.	4 mm <sup>2</sup>
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	10

**Certificates / Approvals**




Certification


GOST

## Diagrams/Drawings

### Diagram

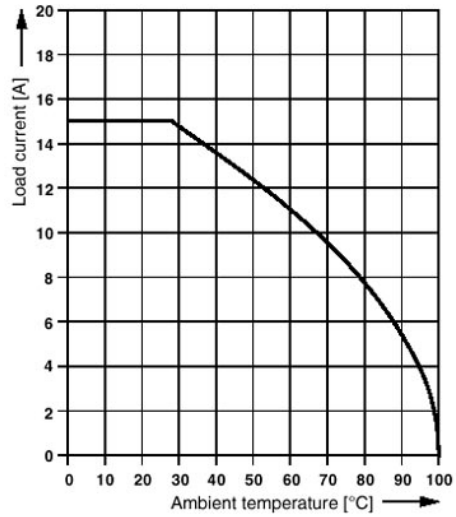


### Dimensioned drawing

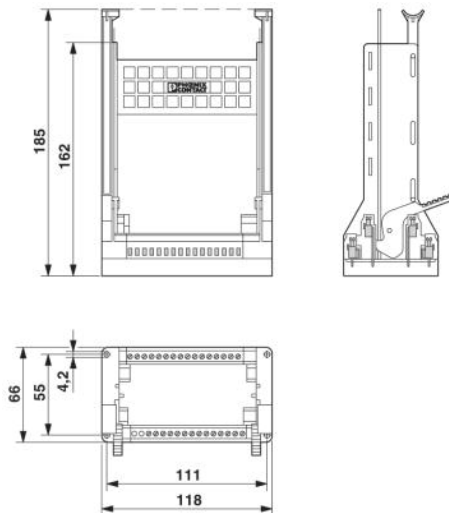

Schematic diagram

---

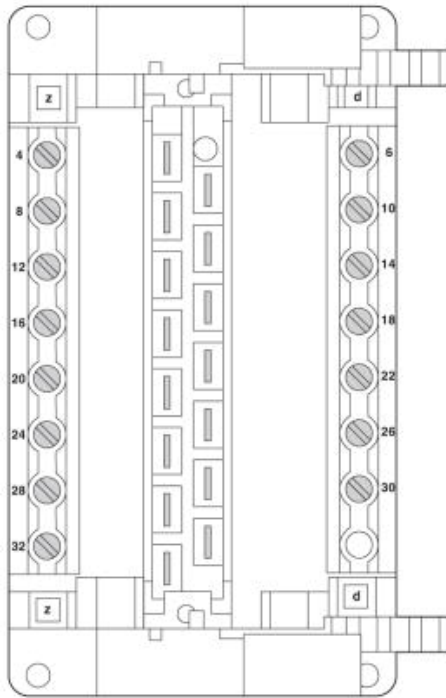

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2011 Phoenix Contact  
Technical modifications reserved;