


FLK 14/16/EZ-DR/HF/ 150/S7

Order No.: 2296935



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2296935>

Assembled halogen-free round cable set, for front connectors the Siemens SIMATIC® "TOP connect" series, with one 16-pos. and one 14-pos. socket strip, for connecting 8 channels, cable length: 1.5 m

| Commercial data | |
|-----------------|--|
| GTIN (EAN) |  4 017918 733667 |
| Note | Made-to-order |
| sales group | I680 |
| Pack | 1 pcs. |
| Customs tariff | 85444290 |

Product notes

WEEE/RoHS-compliant since:
08/01/2005




<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

| Technical data | |
|---|--------------------------------------|
| General | |
| Nominal voltage U_N | < 50 V AC 60 V DC |
| Max. current carrying capacity per path | 1 A (Up to 50°C ambient temperature) |

| | |
|---|---|
| Max. conductor resistance | 0.16 Ω/m |
| Ambient temperature (operation) | -20 °C ... 50 °C |
| Ambient temperature (storage/transport) | -20 °C ... 70 °C |
| Number of positions | 16 |
| Number of positions, control side | 16 |
| Number of connectors, control side | 1 |
| Number of positions, module side | 14 |
| Number of connectors, modul side | 1 |
| Fixed cable length | 1.5 m |
| Single wire, cross section | 0.14 mm ² |
| AWG | 26 |
| Conductor construction: Number of litz wires: | 7 |
| Single wire, material | Cu tin-plated |
| Test voltage | 500 V AC (50 Hz, 1 min.) |
| External diameter | 6.4 mm |
| Cable, preassembly | Insulation displacement, IEC 60352-4/DIN EN 60352-4 |

Diagrams/Drawings

Circuit diagram

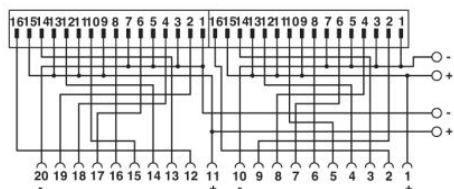

Pin assignment Siemens S7 front connector modules 6ES7 921...

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2011 Phoenix Contact
Technical modifications reserved;