


FLK 14/16/EZ-DR/HF/ 250/S7

Order No.: 2296951



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2296951>

Assembled halogen-free round cable set, for front connectors the Siemens SIMATIC® "TOP connect" series, with one 16-pos. and one 14-pos. socket strip, for connecting 8 channels, cable length: 2.5 m

Commercial data	
GTIN (EAN)	 4 017918 733643
Note	Made-to-order
sales group	I680
Pack	1 pcs.
Customs tariff	85444290

Product notes

WEEE/RoHS-compliant since:
08/01/2005




<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data	
General	
Nominal voltage U_N	< 50 V AC
	60 V DC
Max. current carrying capacity per path	1 A (Up to 50°C ambient temperature)

Max. conductor resistance	0.16 Ω/m
Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C
Number of positions	16
Number of positions, control side	16
Number of connectors, control side	1
Number of positions, module side	14
Number of connectors, modul side	1
Fixed cable length	2.5 m
Single wire, cross section	0.14 mm ²
AWG	26
Conductor construction: Number of litz wires:	7
Single wire, material	Cu tin-plated
Test voltage	500 V AC (50 Hz, 1 min.)
External diameter	6.4 mm
Cable, preassembly	Insulation displacement, IEC 60352-4/DIN EN 60352-4

Diagrams/Drawings

Circuit diagram

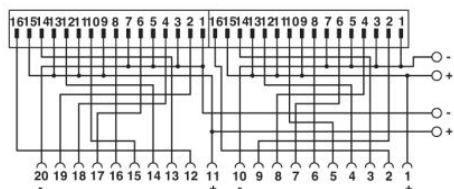

Pin assignment Siemens S7 front connector modules 6ES7 921...

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2011 Phoenix Contact
Technical modifications reserved;