


## VIP-3/SC/D37SUB/M

Order No.: 2315146

The illustration shows version VIP-3/SC/D50SUB/M

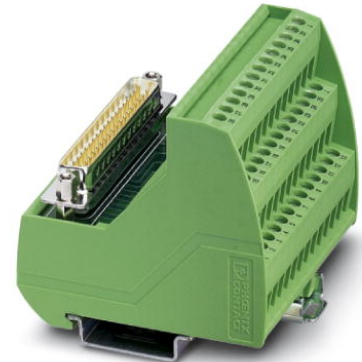


<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2315146>

VARIOFACE module, with screw connection and male D-Subminiature pin strip, for mounting on NS 35/7.5 or NS 32, 37-pos.



### Commercial data

GTIN (EAN)	 4 046356 313315
sales group	I501
Pack	1 pcs.
Customs tariff	85369010
Catalog page information	Page 307 (IF-2011)

### Product notes

WEEE/RoHS-compliant since:  
11/23/2007



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

### Technical data

#### General data

Nominal voltage $U_N$	125 V AC/DC
Max. current carrying capacity per branch	2 A
Number of positions	37
Width	72.7 mm

Height	69 mm
Depth	62 mm
Status display	No
Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C
Mounting position	Any
Standards/regulations	IEC 60664
	DIN EN 50178
	IEC 62103
Pollution degree	2
Surge voltage category	II

#### Connection data

Connection 1	PCB connection
Connection in acc. with standard	IEC / EN
Connection method	Screw connection
Conductor cross section solid min.	0.2 mm <sup>2</sup>
Conductor cross section solid max.	4 mm <sup>2</sup>
Conductor cross section stranded min.	0.2 mm <sup>2</sup>
Conductor cross section stranded max.	2.5 mm <sup>2</sup>
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
Stripping length	8 mm
Screw thread	M 3
Connection 2	D-SUB connection
Number of positions	37

#### Certificates / Approvals



Certification

CSA, CUL, UL

<b>Accessories</b>		
Item	Designation	Description
<b>Cable/conductor</b>		
2302421	CABLE D-SUB-B-B-S/.../.../...	Shielded round cable, assembled with two D-SUB female connectors, variable cable length
2302421	CABLE D-SUB-B-B-S/.../.../...	Shielded round cable, assembled with two D-SUB female connectors, variable cable length
2302340	CABLE D-SUB-S/.../.../...	Shielded round cable, assembled with one D-SUB male and one female connector, variable cable length
2305509	CABLE-D37SUB/B/B/ 100/ KONFEK/S	Assembled, shielded circular cable, with D-SUB socket strip, 37-pos. from both sides, cable length: 1m
2305512	CABLE-D37SUB/B/B/ 200/ KONFEK/S	Assembled, shielded circular cable, with D-SUB socket strip, 37-pos. from both sides, cable length: 2m
2305525	CABLE-D37SUB/B/B/ 300/ KONFEK/S	Assembled, shielded circular cable, with D-SUB socket strip, 37-pos. from both sides, cable length: 3 m
2302191	CABLE-D37SUB/B/S/ 50/ KONFEK/S	Round shielded cable set, with 37-pos. D-SUB female and male connectors, cable length: 0.5 m
2302201	CABLE-D37SUB/B/S/100/ KONFEK/S	Round shielded cable set, with 37-pos. D-SUB female and male connectors, cable length: 1 m
2302214	CABLE-D37SUB/B/S/150/ KONFEK/S	Round shielded cable set, with 37-pos. D-SUB female and male connectors, cable length: 1.5 m
2302227	CABLE-D37SUB/B/S/200/ KONFEK/S	Round shielded cable set, with 37-pos. D-SUB female and male connectors, cable length: 2 m
2302230	CABLE-D37SUB/B/S/300/ KONFEK/S	Round shielded cable set, with 37-pos. D-SUB female and male connectors, cable length: 3 m
2302243	CABLE-D37SUB/B/S/400/ KONFEK/S	Round shielded cable set, with 37-pos. D-SUB female and male connectors, cable length: 4 m
2302256	CABLE-D37SUB/B/S/600/ KONFEK/S	Round shielded cable set, with 37-pos. D-SUB female and male connectors, cable length: 6 m
<b>General</b>		
5147777	BLUEMARK X1	Printers with UV technology for printing plastic labels in UniCard format.
<b>Marking</b>		
0818111	UC-TM 4	UniCard materials for labeling terminal blocks using a marker groove, 120-section, can be labeled with BLUEMARK and CMS-P1-PLOTTER, color: white
0818085	UC-TM 6	UniCard materials for labeling terminal blocks with a marker groove, 80-section, can be labeled with BLUEMARK and CMS-P1-PLOTTER, color: white

0811862	ZB 22:UNBEDRUCKT	Zack marker strip, unprinted: 4-section, for individual labeling with M-PEN, ZB-T or CMS system, sufficient for 100 terminal blocks, for a terminal width of 22 mm, color: White
0809793	ZB 5,08:UNBEDRUCKT	Zack strip, unprinted: 10-section, for individual labeling with M-PEN, ZB-T or CMS system, sufficient for 100 terminal blocks per pack

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2011 Phoenix Contact  
Technical modifications reserved;