

NLC-050-024X-08I-04QRX-05A


Order No.: 2701056



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2701056>

24 V AC/DC Nanoline base unit. Equipped with 8 digital input and 4 relay output channels. Additional I/O channels can be added using a maximum of three I/O expansion modules. Optional communication modules provide network or serial connectivity. Optional Operator Panel provides user interface. Programming is via nanoNavigator.

Commercial data

GTIN (EAN)	4  046356 325356
sales group	K250
Pack	1 pcs.
Customs tariff	85371099
Catalog page information	Page 11 (AX-2011)

Product notes

WEEE/RoHS-compliant since:
03/09/2011



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Supply

Power supply connection	Screw connection
Supply voltage	24 V AC/DC (Power available to the I/O and Communications modules)

Supply voltage range	19 V AC/DC ... 30 V DC (26 V AC)
Typical current consumption	280 mA (@ 24 V AC/DC)

Software interfaces

Programming tool	nanoNavigator 1 or 2
------------------	----------------------

Digital inputs

Input name	Digital inputs
Description of the input	EN 61131-2 type 1 NPN/PNP
Connection method	Screw connection
Number of inputs	8
Typical response time	20 ms
Input voltage range "0" signal	0 V AC/DC ... 5 V AC/DC
Input voltage range "1" signal	15 V AC/DC ... 30 V AC/DC
Nominal input current at U_{IN}	5 mA DC (On)

Digital outputs

Output name	Relay output
Output description	Relay output
Connection method	Screw connection
Number of outputs	4
Protective circuit	Short-circuit and overload protection
Maximum output current per channel	5 A
Maximum output current per module / terminal block	20 A
Maximum output current per module	5 A
Nominal load, ohmic	600 W (@ 24 ohms)

General data


Width	80.5 mm
Height	103.5 mm
Depth	60 mm
Mounting type	DIN rail
Degree of protection	IP20
Ambient temperature (operation)	-25 °C ... 60 °C
Ambient temperature (storage/transport)	-25 °C ... 85 °C
Permissible humidity (operation)	90 %

Accessories


Item	Designation	Description
General		
2701289	NLC-MOD-CAP	Replacement cover for slot 1 in base unit.
2701292	NLC-MOD-CAP-PXC	Replacement cover for slot 2 in base unit.

Diagrams/Drawings

Connection diagram

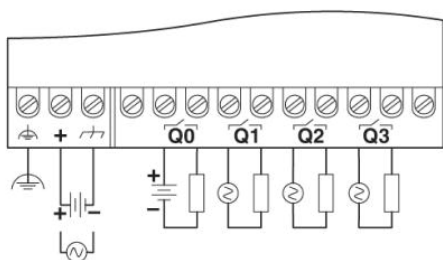

Dimensioned drawing

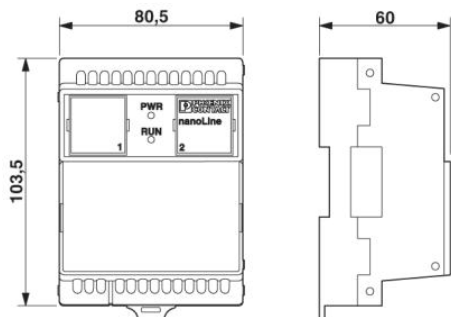

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2011 Phoenix Contact
Technical modifications reserved;