


# DT-UFB-V24/S-9-SB

Order No.: 2803069



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2803069>

Attachment plug with surge protection for V.24 interface. Connection: D-SUB-9 plug/socket, installation in lines

Commercial data	
GTIN (EAN)	
sales group	J400
Pack	1 pcs.
Customs tariff	85363010
Catalog page information	Page 142 (TT-2011)

### Product notes

WEEE/RoHS-compliant since: 09/04/2007



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data	
<b>General</b>	
Housing material	Zinc die-cast
Color	silver/black
Standards for air and creepage distances	IEC 60664-1: 1992-10
	VDE 0110-1
Total surge current (8/20) $\mu$ s	5 kA

Ambient temperature (operation)	-40 °C ... 85 °C
Mounting type	Connection-specific attachment plug and DIN rail, 35 mm
Design	Attachment plug for DIN rail mounting
Number of positions	9
Degree of protection	IP20
Direction of action	Line-Line & Line-Signal Ground/Shield & Signal Ground/Shield-Earth Ground
Width	25.00 mm
Height	63.00 mm
Length	110.00 mm

**Protective circuit**

IEC category	B2
	C1
	C2
	C3
VDE requirement class	B2
	C1
	C2
	C3
Maximum continuous operating voltage $U_c$	15 V DC
	10 V AC
Maximum continuous voltage $U_c$ (wire-GND)	15 V DC
	10 V AC
Nominal current $I_N$	$\leq 1$ A (25°C)
Operating effective current $I_c$ at $U_c$	$\leq 5$ $\mu$ A (per wire)
Ground conductor current $I_{PE}$	$\leq 1$ $\mu$ A
Nominal discharge surge current $I_n$ (8/20) $\mu$ s (Core-Core)	$\leq 250$ A
Nominal discharge surge current $I_n$ (8/20) $\mu$ s (Core-Earth)	$\leq 250$ A
Nominal discharge surge current $I_n$ (8/20) $\mu$ s (Core-GND)	$\leq 250$ A
Total surge current (8/20) $\mu$ s	5 kA
Nominal pulse current $I_{an}$ (10/1000) $\mu$ s (Core-Core)	50 A
Nominal pulse current $I_{an}$ (10/1000) $\mu$ s (Core-Earth)	50 A

Nominal pulse current $I_{an}$ (10/1000) $\mu$ s (Core-GND)	50 A
Nominal pulse current $I_{an}$ (10/700) $\mu$ s (Core-Core)	50 A
Nominal pulse current $I_{an}$ (10/700) $\mu$ s (Core-Earth)	50 A
Nominal pulse current $I_{an}$ (10/700) $\mu$ s (Core-GND)	50 A
Output voltage limitation at 1 kV/ $\mu$ s (Core-Core) static	$\leq 50$ V
Output voltage limitation at 1 kV/ $\mu$ s (Core-GND) static	$\leq 30$ V
Residual voltage at $I_{n1}$ (conductor-conductor)	$\leq 55$ V
Residual voltage at $I_n$ (conductor-GND)	$\leq 30$ V
Protection level $U_p$ (Core-Core)	$\leq 55$ V (B2 - 25 A) $\leq 55$ V (C1 - 250 A)
Protection level $U_p$ (Core-Earth)	$\leq 400$ V (B2 - 25 A) $\leq 450$ V (C1 - 250 A)
Protection level $U_p$ (Core-GND)	$\leq 30$ V (C1 - 250 A) $\leq 30$ V (B2 - 25 A)
Response time $t_A$ (Core-Core)	$\leq 1$ ns
Response time $t_A$ (Core-Earth)	$\leq 1$ ns
	$\leq 100$ ns
Response time $t_A$ (Shield-Earth)	$\leq 100$ ns
Input attenuation $a_E$ , sym.	Typ. 0.3 dB ( $\leq 700$ kHz / 100 $\Omega$ ) Typ. 0.3 dB ( $\leq 700$ kHz / 150 $\Omega$ )
Input attenuation $a_E$ , asym.	Typ. 0.3 dB ( $\leq 400$ kHz / 100 $\Omega$ ) Typ. 0.3 dB ( $\leq 400$ kHz / 150 $\Omega$ )
Cut-off frequency $f_g$ (3 dB), sym. in 100 Ohm system	Typ. 2.5 MHz
Cut-off frequency $f_g$ (3 dB), sym. in 150 Ohm system	Typ. 2.5 MHz
Cut-off frequency $f_g$ (3 dB), asym. (GND) in 100 Ohm system	Typ. 1.3 MHz
Cut-off frequency $f_g$ (3 dB), asym. (GND) in 150 Ohm system	Typ. 1.3 MHz
Capacity (Core-Core)	Typ. 1 nF ( $f=1$ MHz / $V_R=0$ V)
Capacity (Core-GND)	Typ. 2 nF ( $f=1$ MHz / $V_R=0$ V)

Surge carrying capacity in acc. with IEC 61643-21 (Core-Core)	B2 (1 kV/25 A)
	C1 (500 V / 250 A)
Surge carrying capacity in acc. with IEC 61643-21 (Core-GND)	B2 (1 kV/25 A)
	C1 (500 V/250 A)

**Connection data**

Connection method	D-SUB-9
Connection type IN	D-SUB-9 male connector
Connection type OUT	D-SUB-9 female connector

**Connection, equipotential bonding**

Connection method	Cable connection / DIN rail
-------------------	-----------------------------

**Connection, protective circuit**

Standards/regulations	IEC 61643-21
-----------------------	--------------

**Certificates / Approvals**




Certification GOST

**Accessories**


Item	Designation	Description
<b>General</b>		
1656233	VS-09-DSUB-20-LI-1,0	Assembled D-SUB cable shielded, 9-pos., stranded (7-wire), cable color RAL 7000 (gray), IP20 degree of protection, head 1 with socket shell 1 and straight cable outlet, head 2 with pin shell 1 and straight cable outlet, length: 1 m

## Diagrams/Drawings

### Dimensioned drawing

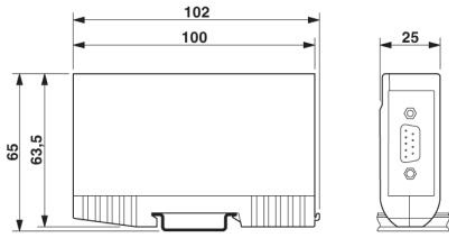

### Circuit diagram

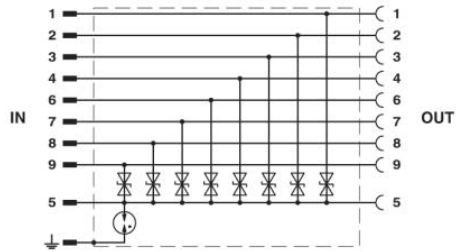

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2011 Phoenix Contact  
Technical modifications reserved;