

PSR-SPP- 24UC/ESA4/3X1/1X2/B

Order No.: 2963941


The figure shows a version with a screw connection



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2963941>

Safety relay to emergency stop and safety door monitoring up to SIL 3 or Cat. 4, PL e according to EN ISO 13849, one- or two-channel operation, automatic activation, 3 enabling current paths, nominal input voltage 24 V AC/DC



| Commercial data | |
|--------------------------|--|
| GTIN (EAN) |  4 017918 904784 |
| Note | Made-to-order |
| sales group | G503 |
| Pack | 1 pcs. |
| Customs tariff | 85364900 |
| Catalog page information | Page 21 (IF-2009) |

Product notes

WEEE/RoHS-compliant since:
03/30/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

| Input data | |
|---|--------------|
| Nominal input voltage U_N | 24 V AC/DC |
| Input voltage range in reference to U_N | 0.85 ... 1.1 |

| | |
|---|--|
| Typical input current at U_N | 140 mA AC |
| | 65 mA DC |
| Voltage at input/start and feedback circuit | Approx. 24 V DC |
| Typical response time | 100 ms (automatic start) |
| Typical release time | 45 ms (single-channel) |
| | 10 ms (two-channel) |
| Concurrence input 1/2 | Infinite |
| Recovery time | 1 s |
| Max. permissible overall conductor resistance | Approx. 50 Ω (Input and start circuits at U_N) |

Output data

| | |
|--|--|
| Contact type | 3 enabling current paths, 1 signaling current path |
| Contact material | AgSnO ₂ , + 0.2 μ m Au |
| Maximum switching voltage | 250 V AC/DC |
| Minimum switching voltage | 15 V AC/DC |
| Limiting continuous current | 6 A (N/O contact) |
| Maximum inrush current | 6 A |
| Inrush current, minimum | 25 mA |
| Sq. Total current | 72 A ² ($I_{TH}^2 = I_1^2 + I_2^2 + I_3^2$) |
| Interrupting rating (ohmic load) max. | 144 W (24 V DC, $\tau = 0$ ms) |
| | 288 W (48 V DC, $\tau = 0$ ms) |
| | 77 W (110 V DC, $\tau = 0$ ms) |
| | 88 W (220 V DC, $\tau = 0$ ms) |
| | 1500 VA (250 V AC, $\tau = 0$ ms) |
| Maximum interrupting rating (inductive load) | 48 W (24 V DC, $\tau = 40$ ms) |
| | 40 W (48 V DC, $\tau = 40$ ms) |
| | 35 W (110 V DC, $\tau = 40$ ms) |
| | 35 W (220 V DC, $\tau = 40$ ms) |
| Switching capacity min. | 0.4 W |
| Output fuse | 10 A gL/gG NEOZED (N/O contact) |
| | 6 A gL/gG NEOZED (N/C contact) |

General data

| | |
|--------|----------|
| Width | 22.5 mm |
| Height | 112 mm |
| Depth | 114.5 mm |

| | |
|---|--|
| Ambient temperature (operation) | -20 °C ... 55 °C |
| Ambient temperature (storage/transport) | -40 °C ... 70 °C |
| Relay type | Electromechanically forcibly guided, dust-proof relay. |
| Mechanical service life | Approx. 10 ⁷ cycles |
| Mounting position | Any |
| Category in acc. with EN 954-1 | 4 |
| Stop category | 0 |
| Name | Air and creepage distances between the power circuits |
| Standards/regulations | DIN EN 50178/VDE 0160 |
| Rated surge voltage / insulation | 4 kV / Basic isolation, (safe isolation, reinforced insulation and 6 kV between input circuit and enabling current paths.) |
| Rated insulation voltage | 250 V |
| Pollution degree | 2 |
| Surge voltage category | III |

Connection data

| | |
|--|---------------------|
| Conductor cross section solid min. | 0.2 mm ² |
| Conductor cross section solid max. | 1.5 mm ² |
| Conductor cross section stranded min. | 0.2 mm ² |
| Conductor cross section stranded max. | 1.5 mm ² |
| Conductor cross section AWG/kcmil min. | 24 |
| Conductor cross section AWG/kcmil max | 16 |
| Stripping length | 8 mm |
| Connection method | Spring-cage conn. |

Certificates / Approvals




Certification

CUL Listed, GOST, TUEV-RH, UL Listed

Diagrams/Drawings

Circuit diagram

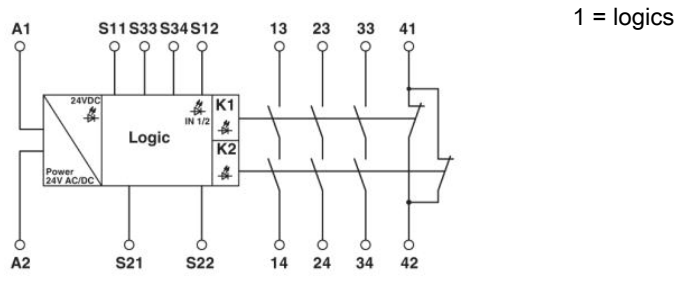

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2011 Phoenix Contact
Technical modifications reserved;