


# P-FU 5X20

Order No.: 3036806



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=3036806>

Fuse plug, Nominal current: 6.3 A, Nominal voltage: 500 V, Width: 6.2 mm, Fuse type: G / 5 x 20, Fuse type: Glass, Color: black

Commercial data	
GTIN (EAN)	 4 017918 943899
sales group	A699
Pack	10 pcs.
Customs tariff	85366990
Catalog page information	Page 399 (CL1-2011)

### Product notes

WEEE/RoHS-compliant since: 01/01/2003



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

## Technical data

General	
Note	Prior to replacing the cartridge fuse, disconnect the fuse connector from the basic terminal block.
Color	black
Insulating material	PA
Inflammability class acc. to UL 94	V0

**Dimensions**

Width	6.2 mm
Length	28 mm
Height	25 mm

**Technical data**

Maximum load current	6.3 A
Nominal current $I_N$	6.3 A
Nominal voltage $U_N$	500 V (if used as fuse terminal block)
	500 V (if used as disconnect terminal block)
Open side panel	nein

**Certificates / Approvals**




Certification


CSA

**Diagrams/Drawings**

Application drawing

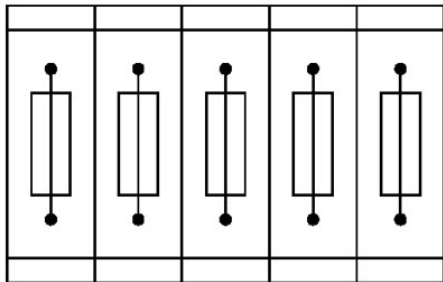

Fuse terminal blocks in inter-connected arrangement, block consisting of 5 fuse terminal blocks

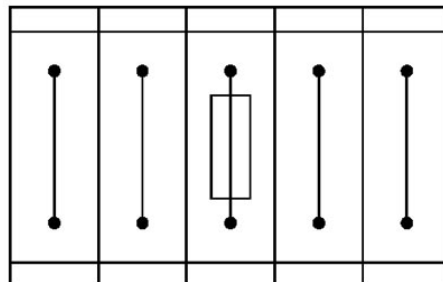

Fuse terminal block in single arrangement, block consisting of one fuse terminal block and 4 feed-through terminal blocks

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2011 Phoenix Contact  
Technical modifications reserved;