

## **Moisture Separator**

### **Reliable Separator for Contaminant Removal.**

Van Air's Moisture Separators remove compressor lubricant, oil aerosols, and moisture from compressed Air Systems. These separators have flow capacities up to 800 SCFM at 100 psig and available in 1/2" through 3" connection sizes. The moisture separator housings are made of cast aluminum and they are coated for corrosion resistance. Each Moisture Separator requires no electricity and includes a push-on cartridge and manual or automatic drain valve.








#### **STANDARD EQUIPMENT**

- · Push on element cartridge
- · ADM-3 automatic drain valve
- E-coated and epoxy powder coated seperator housing
- 800 SCFM Max Flow Rating
- Lifetime warranty

#### **OPTIONAL EQUIPMENT**

- Drain kits
- · Wall mounting kits
- · Connector kits for an F200 Filter

Model		Flow Rating (SCFM)	In/Out Conn. (In.)	Height (In.)	Width (In.)	Weight (lbs.)
	Part Number					
SEP-25-M	80-0860	25	1/2 NPT	10 5/16	2 13/16	1.7
SEP-55-M	83-0861	55	1/2 NPT	12 1/8	3 7/16	2.2
SEP-100-M	83-0862	100	1 NPT	14 5/8	5	5.7
SEP-265-M	83-0863	265	1 <sup>1</sup> / <sub>4</sub> NPT	20 7/16	4 15/16	7.7
SEP-350-M	83-0864	350	1 ½ NPT	21 1/2	5 5/16	8.7
SEP-500-M	83-0865	500	2 NPT	29 7/16	5 5/16	9.9
SEP-800-M	83-0866	800	3 NPT	31 3/8	7 7/8	21.9
Automatic Se	perators					
SEP-25-AD	83-0850	25	1/2 NPT	10 5/16	2 13/16	1.7
SEP-55-AD	83-0851	55	1/2 NPT	12 1/8	3 7/16	2.2
SEP-100-AD	83-0852	100	1 NPT	14 5/8	5	5.7
SEP-265-AD	83-0853	265	1 <sup>1</sup> / <sub>4</sub> NPT	20 7/16	4 15/16	7.7
SEP-350-AD	83-0854	350	1 ½ NPT	21 1/2	5 5/16	8.7
SEP-500-AD	83-0855	500	2 NPT	29 7/16	5 5/16	9.9
SEP-800-AD	83-0856	800	3 NPT	31 3/8	7 7/8	21.9

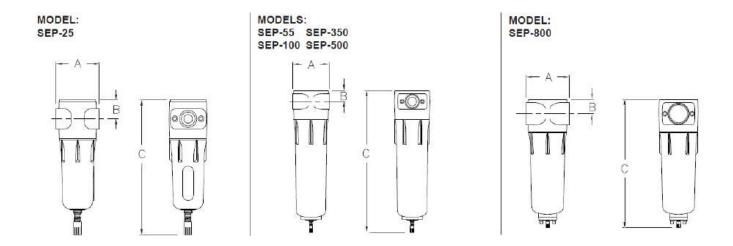

2950 Mechanic Street, Lake City, PA 16423, USA | Toll Free Phone 800-840-9906 | Corporate Fax 814-774-0778 | Order Entry Fax 814-774-3482

Distributed By:





# **Moisture Separators- PDF Downloads**

#### **Instruction Manuals**



#### **Sales Drawings**

Coming Soon