




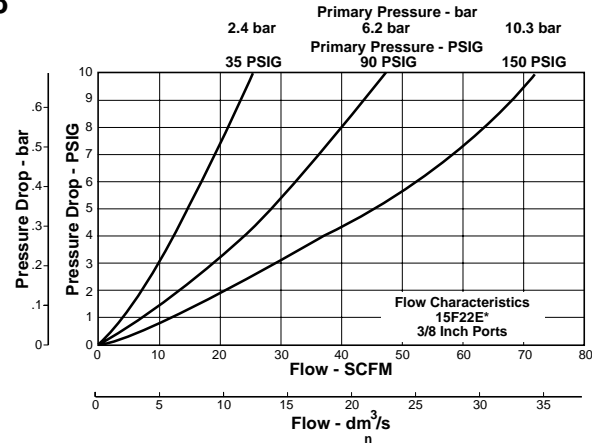


**Technical Information**

**Grade 6**

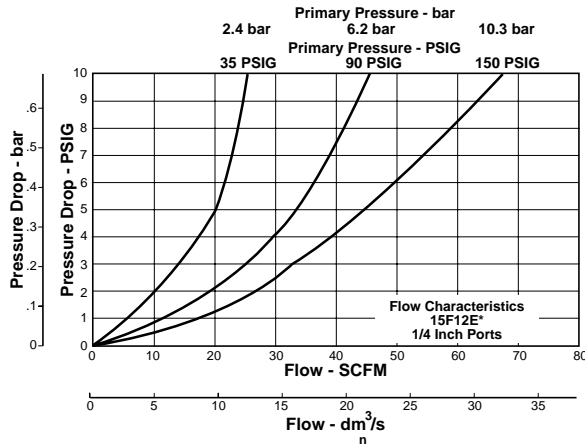

**Grade 10**

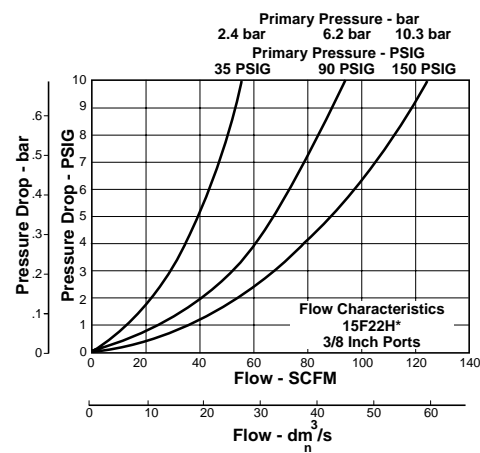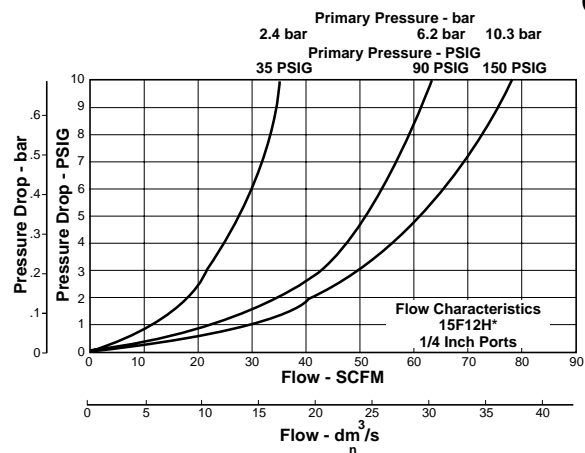

**15F Coalescing Filter Kits & Accessories**

- Bowl Guard Kit** ..... PS905P
- Bowl Kits –**
- Poly Bowl – Automatic Pulse Drain ..... PS995P
- Twist Drain ..... PS932P
- Metal Bowl – Automatic Pulse Drain ..... PS997P
- Twist Drain ..... PS934P
- Sight Gauge / Automatic Pulse Drain ..... PS996P
- Sight Gauge / Twist Drain ..... PS935P
- DPI Replacement Kit** ..... PS781P
- Electronic DPI Replacement Kit** ..... PS764
- Drain Kit –**
- Automatic Pulse Drain ..... PS998P
- Semi-Auto Drain ..... PS511P
- Twist Drain ..... PS512P
- Push ‘N’ Drain ..... PS513P
- Electrical Connector - 15mm, 3-Pin DIN, 6 Ft. Cord** .... PS2932JBP
- Filter Element Kits –**
- Grade 6 (Standard) ..... PS924P
- Grade 10 (Optional) ..... PS930P
- Mounting Bracket Kit** ..... PS943P
- Sight Gauge Kit** ..... PS914P

**Specifications**

- Bowl Capacity** ..... 2.0 Ounces
- Sump Capacity** ..... 0.9 Ounce
- Port Threads** ..... 1/4, 3/8 Inch

**Pressure & Temperature Ratings –**

- Without Differential Pressure Indicator:
  - Polycarbonate Bowl – 0 to 150 PSIG (0 to 10.3 bar)
  - 32°F to 125°F (0°C to 52°C)
  - Metal Bowl – 0 to 250 PSIG (0 to 17.2 bar)
  - 32°F to 175°F (0°C to 80°C)
- With Differential Pressure Indicator: 0 to 150 PSIG (0 to 10.3 bar)
- 32°F to 125°F (0°C to 52°C)

**Weight** ..... 1.2 lb. (0.54 kg)

**Materials of Construction**

- Body** ..... Zinc
- Bowls** ..... Transparent Polycarbonate
- Metal (Zinc) Without Sight Gauge
- Bowl Guards** ..... Steel
- Collar** ..... Plastic
- Drain** ..... Plastic
- Filter Element –**
- Borosilicate & felt glass fibers 99.97% DOP efficiency
- Largest Aerosol Particle Passed (Grade 6) ..... 0.01 Micron
- Largest Solid Particle Passed (Grade 6) ..... 0.30 Micron
- Seals** ..... Nitrile
- Sight Gauge, DPI** ..... Polyamide (Nylon)

