



AND Element



PLLA11

Part Number	Description
PLLA11	5/32" Instant
PLLA15	10-32 UNF

OR Element



PLKA11


Part Number	Description
PLKA11	5/32" Instant
PLKA15	10-32 UNF

Mounting Clip Assembly



PZML199

Part Number	Description
PZML199	1 Set of 10 Clip Assemblies

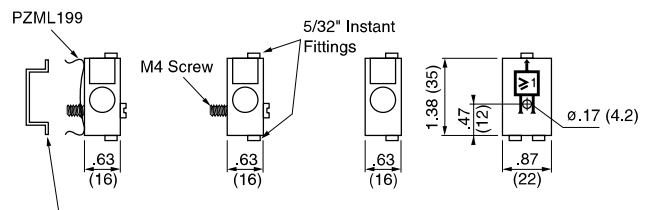

Specifications

Air Quality

Standard Shop Air, Lubricated or Dry,
40 µm Filtration

Cv (kv)

0.14 (1.8)

Flow rate at 90 PSI (6 bar) in SCFM

(I/mn ANR)

6.4 (180)

Materials

- Body Polyamide
- Poppet Polyurethane
- Seals Nitrile (Buna N)

Mounting

Inline or 35mm DIN Rail

**Number of Operations with Dry Air
at 90 PSI and 70°F – Frequency 1 Hz**

10 Million

Operating Positions

All Positions

Operating Pressure

40 to 115 PSIG (3 to 8 bar)

Ports

Standard: 5/32" Instant for Semi-
Rigid Nylon or Polyurethane Tube
10-32 UNF Available

Response Time

2 to 3 msec

Temperature

Operating
32°F to 122°F (0°C to +50°C)

Storage

-22°F to 140°F (-30°C to +60°C)