


FF44 Pipe Nipples BSPP


PART NO.	BSPP	C HEX	L
1/8FF44B	1/8	14	19
1/4FF44B	1/4	17	22
3/8FF44B	3/8	22	24
1/2FF44B	1/2	27	31



Metric Straight Thread Union M16M22F8UHA8UB


PART NUMBER	METRIC THD 1	METRIC THD 2	L (mm)	HEX (mm)	M (mm)	M1 (mm)	D (mm)
M16M22F8UHA8UB	M16X1.5	M22X1.5	43	27	10	12.5	9.0

Note: Fluorocarbon o-ring is standard

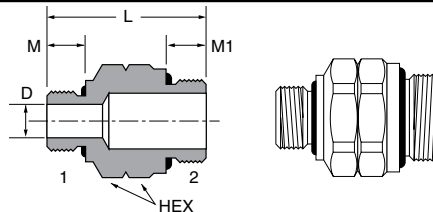


FG43 Reducing Connector Female-Male BSPP-BSPT

PART NO.	BSPT 1	BSPP 2	C HEX	L
1/4x1/8FG43B	1/8	1/4	17	23
3/8x1/8FG43B	1/8	3/8	22	25
3/8x1/4FG43B	1/4	3/8	22	28
1/2x1/8FG43B	1/8	1/2	27	29
1/2x1/4FG43B	1/4	1/2	27	32
1/2x3/8FG43B	3/8	1/2	27	31
3/4x1/2FG43B	1/2	3/4	32	39
1x3/4FG43B	3/4	1	41	38



FHG4 Adapter Male NPTF BSPP


PART NO.	BSPP 1	NPTF 2	C HEX	L	FLOW D
1/8FHG4-B	1/8	1/8	0.562	0.870	.22
1/4FHG4-B	1/4	1/4	0.750	1.125	.31
3/8FHG4-B	3/8	3/8	0.875	1.125	.44
1/2FHG4-B	1/2	1/2	1.062	1.660	.60



Pipe to Metric Adaptor 222P-X-MIX

PART NUMBER	NPTF	METRIC THREAD	HEX	L	M	D
222P-2-MI10	1/8-27	M10 x 1.0	9/16	.75	.34	.18
222P-2-MI14	1/8-27	M14 x 1.5	3/4	.91	.43	.30
222P-4-MI12	1/4-18	M12 x 1.5	11/16	1.09	.43	.24
222P-6-MI16	3/8-18	M16 x 1.5	7/8	1.10	.45	.35
222P-6-MI22	3/8-18	M22 x 1.5	1 1/16	1.05	.37	.47
222P-8-MI27	1/2-14	M27 x 2.0	1 1/4	1.32	.63	.60


Note: Fluorocarbon o-ring is standard

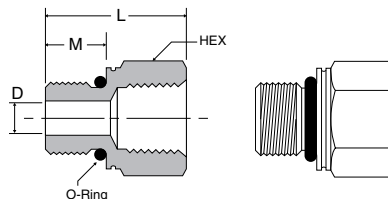

Hose Barb to Metric Adaptor 68HB-X-MIX

PART NUMBER	TUBE SIZE	METRIC THREAD	HEX	L	M	D
68HB-6-M12	3/8	M12 x 1.5	11/16	1.50	.78	.24
68HB-6-M14	3/8	M14 1.5	3/4	1.51	.78	.30
68HB-8-M12	1/2	M12 x 1.5	11/16	1.50	.78	.24
68HB-10-M127	5/8	M27 x 2.0	1 1/4	1.77	.78	.50


Note: Fluorocarbon o-ring is standard
 For working pressure and Temperature see Hose Barb Section

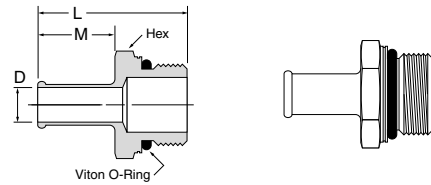

Beaded Elbow to Metric Adaptor 169HB-X-MIX

PART NUMBER	HOSE SIZE	METRIC THREAD	HEX	L	M	N	D
169HB-10-MI27	5/8	M27 x 2.0	7/8	1.41	.78	1.63	.50
169HB-16-MI27	1	M27 x 2.0	1	1.67	.97	1.68	.71


Note: Fluorocarbon o-ring is standard
 For working pressure and Temperature see Hose Barb Section

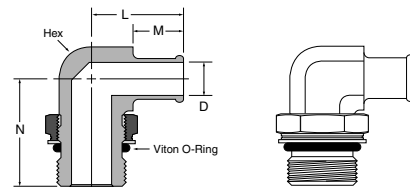

NTA to Metric Adaptor 68NTA-X-MIX

PART NUMBER	TUBE SIZE	METRIC THREAD	B HEX	C HEX	L	D
68NTA-4-MI10	1/4	M10 x 1.0	9/16	9/16	1.33	.140

Note: Fluorocarbon o-ring is standard
 For working pressure and Temperature see Air Brake-NTA Section

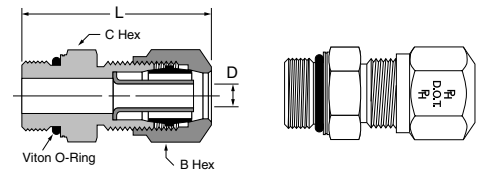

Beaded Hose Barb 45° Elbow to Metric Thread 179HB-X-MIX

PART NUMBER	HOSE SIZE	METRIC THREAD	HEX	L	M	N	D
179HB-12-MI18	3/4	M18 x 1.5	13/16	1.15	.78	1.16	.44
179HB-16-MI27	1	M27 x 2.0	1 1/16	1.51	.97	1.71	.71

