


**SACC-V-4CON-PG7/C-3+PE**

Order No.: 1511967

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1511967>Valve connector, 4-pos., type C, unconnected, screw connection,  
cable screw connection Pg7**Commercial data**

GTIN (EAN)	 4 017918 909345
sales group	D123
Pack	1 pcs.
Customs tariff	85366990
Catalog page information	Page 110 (PC-2009)

**Product notes**WEEE/RoHS-compliant since:  
02/21/2006

<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.


**Technical data****General data**

Rated current at 40°C	10 A
Rated voltage	240 V
Number of positions	4
Volume resistance	≤ 15 mΩ
Insulation resistance	≥ 100 MΩ


Ambient temperature (operation)	-40 °C ... 120 °C (plug connectors)
<b>General characteristics</b>	
Surge voltage category	II
Pollution degree	3
Degree of protection	IP65
Contact material	CuSn
Contact surface material	Ni
Valve plug contact insert material	PA6
Material, housing, valve plug	PA6
Sealing material	NBR
Connection method	Screw connection
Conductor cross section stranded min.	0.34 mm <sup>2</sup>
Conductor cross section stranded max.	1.5 mm <sup>2</sup>
Conductor cross section AWG/kcmil min.	22
Conductor cross section AWG/kcmil max	16
External cable diameter	4 mm ... 6 mm
Status display	No

**Diagrams/Drawings**

Dimensioned drawing

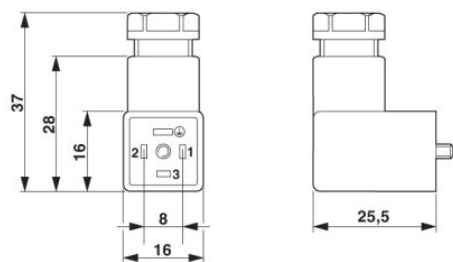


Circuit diagram

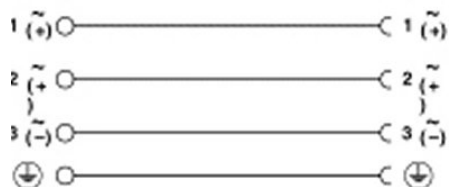

Schematic diagram

---

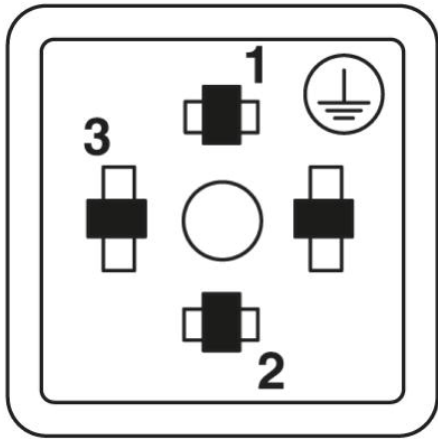

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2011 Phoenix Contact  
Technical modifications reserved;