

# VIP-3/SC/HD26SUB/F

Order No.: 2322414

The illustration shows a 44-position version with female insert




<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2322414>

VARIOFACE module, with screw connection and high density D-Subminiature female connector, for mounting on NS 32 or NS 35/7.5, no. of pos.: 26, width: 79 mm



## Commercial data

GTIN (EAN)	 4 046356 451710
sales group	I501
Pack	1 pcs.
Customs tariff	85369010
Catalog page information	Page 313 (IF-2011)

## Product notes

WEEE/RoHS-compliant since:  
03/16/2009



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

## Technical data

### General data

Nominal voltage $U_N$	125 V
Max. current carrying capacity per branch	1 A
Number of positions	26
Width	52.3 mm

Height	69 mm
Depth	62 mm
Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C
Mounting position	Any

**Connection data**

Connection 1	PCB connection
Connection in acc. with standard	IEC / EN
Connection method	Screw connection
Number of positions	26
Conductor cross section solid min.	0.2 mm <sup>2</sup>
Conductor cross section solid max.	4 mm <sup>2</sup>
Conductor cross section stranded min.	0.2 mm <sup>2</sup>
Conductor cross section stranded max.	2.5 mm <sup>2</sup>
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
Stripping length	8 mm
Screw thread	M3
Connection 2	D-SUB connection
Connection method	Pluggable


**Certificates / Approvals**

Certification


CUL, UL

## Diagrams/Drawings

### Circuit diagram

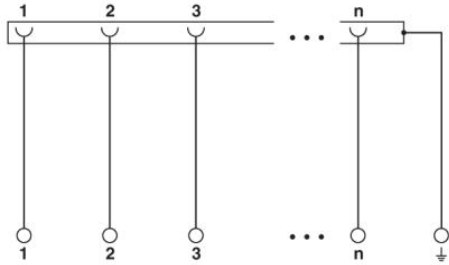

### Schematic diagram

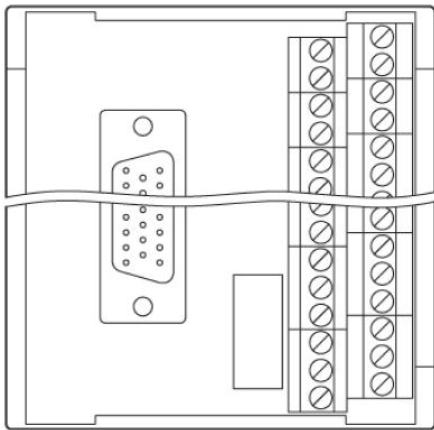

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2011 Phoenix Contact  
Technical modifications reserved;