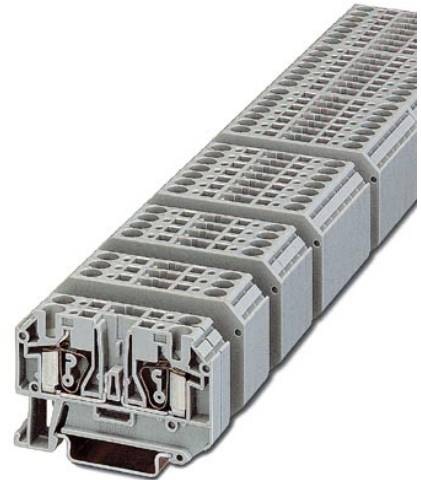


ZFK-RELG 2


Order No.: 2829904

The illustration shows versions with a different no. of positions

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2829904>

Basic termination blocks with spring-cage connection for NS 35/7.5 DIN rail, with end cover, for ST-REL..., ST-OV... and ST-OE... plugs, 2-pos.

Commercial data

GTIN (EAN)	 4 017918 101152
sales group	G005
Pack	10 pcs.
Customs tariff	85369010
Catalog page information	Page 77 (IF-2002)

Product notes

WEEE/RoHS-compliant since:
01/01/2003

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data

Number of positions	2
Nominal voltage U_N	400 V (voltage is determined by the coupling connector.)

Nominal current I _N	16 A (current is determined by the coupling connector.)
Color	gray
Insulating material	PA
Width	14.6 mm
Height	58.4 mm
Depth	108 mm

Connection data

Conductor cross section solid min.	0.5 mm ²
Conductor cross section solid max.	6 mm ²
Conductor cross section stranded min.	0.4 mm ²
Conductor cross section stranded max.	4 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	10
Connection method	Spring-cage connection
Stripping length	14 mm

Accessories

Item	Designation	Description
1201442	E/UK	End clamp, for assembly on NS 32 or NS 35/7.5 DIN rail

Assembly**Plug/Adapter**


3002885	ISH 4/0,5	Insulating sleeve, Color: gray
3002898	ISH 4/1,0	Insulating sleeve, Color: black

Tools


1204517	SZF 1-0,6X3,5	Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip
3002940	ZFK-BW 2-6	Actuation tool, for loosening the tension spring, 2-pos.
3002953	ZFK-BW 3-6	Actuation tool, for loosening the tension spring, 3-pos.
3002966	ZFK-BW 5-6	Actuation tool, for loosening the tension spring, 5-pos.

Diagrams/Drawings

Dimensioned drawing

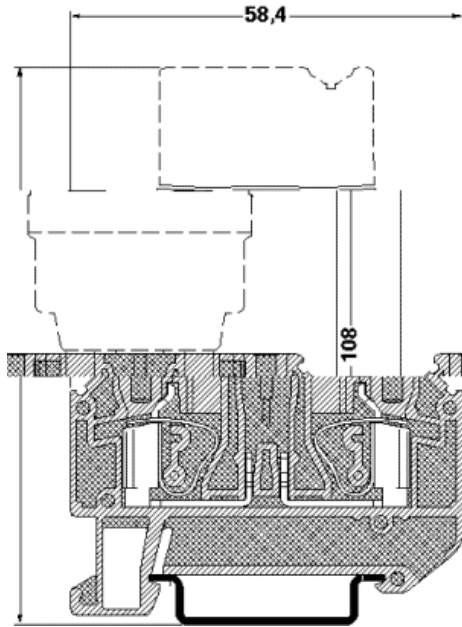

Schematic diagram

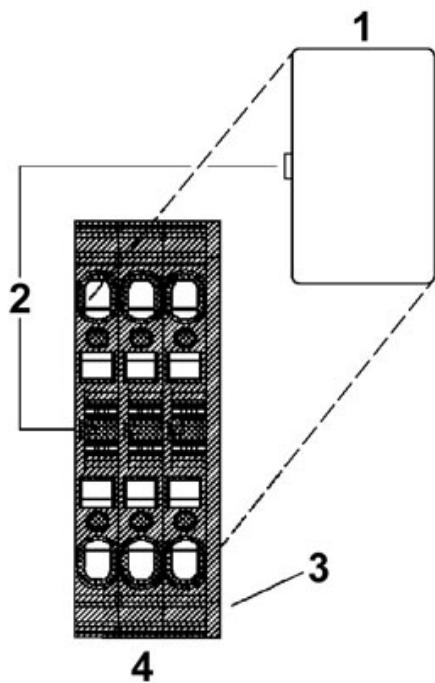

- 1 = Coupling connector
- 2 = Coding
- 3 = Cover
- 4 = Basic termination block

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2011 Phoenix Contact
Technical modifications reserved;